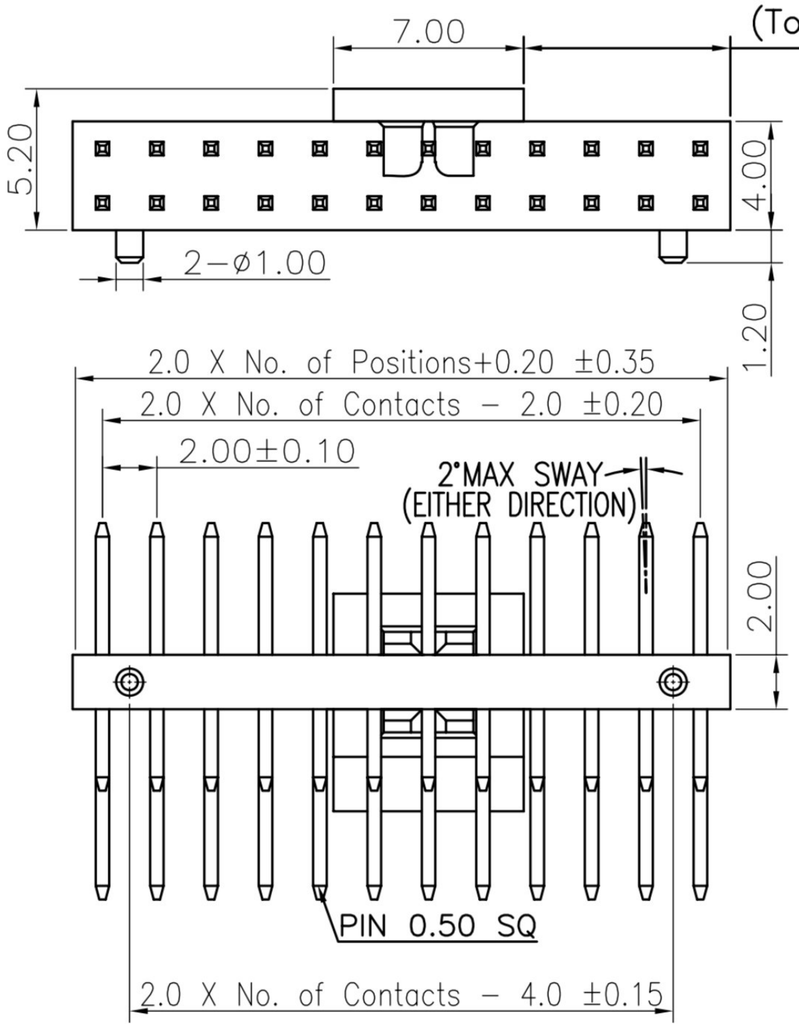

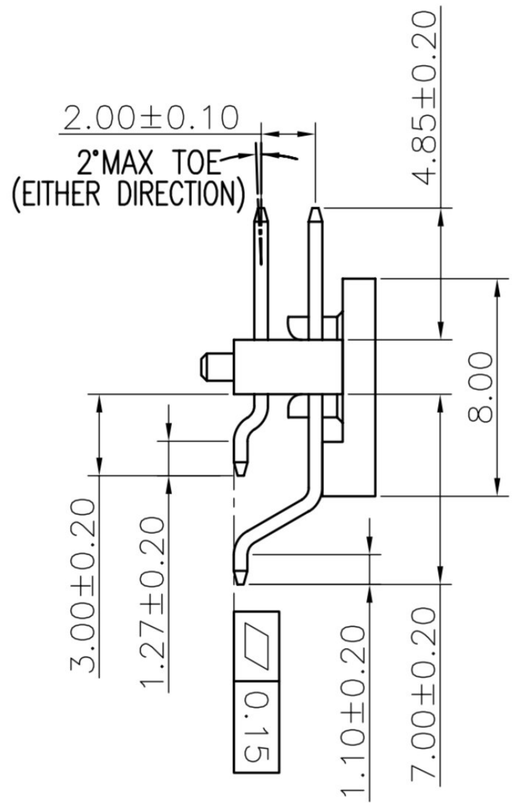

Specifications
Current Rating:2Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Brass
Insulator Material:High Temperature Thermoplastic, UL 94V−0 Nylon 6T

Recommended P.C.Board Layout
(Tolerance:±0.05)

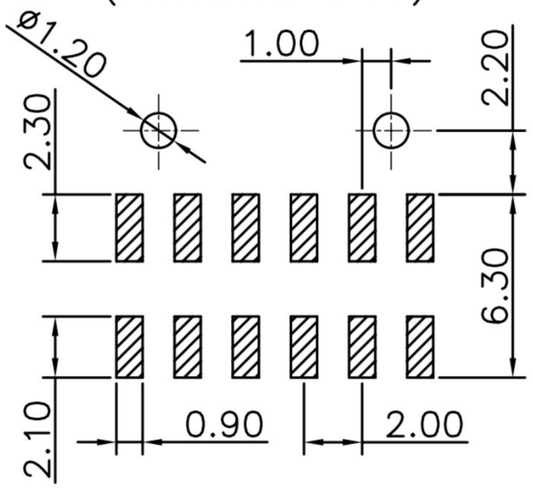

RoHS Compliant

HSm 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN		TOLERANCE: X.°±5.0° X.±0.30; .X°±3.0° .X±0.25; .XX°±2.0° .XX±0.15; .XXX°±1.0° .XXX±0.10	PART NAME 品名: 2.0mm PIN HEADER DUAL ROW HORIZONTAL SMT TYPE H=4.0mm 2XXXP WITH LOCATING PEG (C=4.85mm D=3.0mm E=7.0mm) ROHS
DWG. 製圖 ABBY	SCALE 比例 參考		
	UNIT 單位 MM	SIZE. 紙張尺寸 A4	
DATE 制表日 2016/10/21	PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 C6201-XXBDXATXR