


1 2 3 4 5 6 7 8

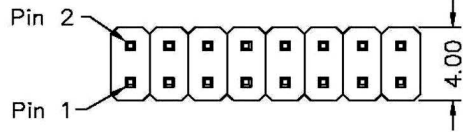

**MATERIAL**

Contact Pin : Brass

**SPECIFICATION**



Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V


Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

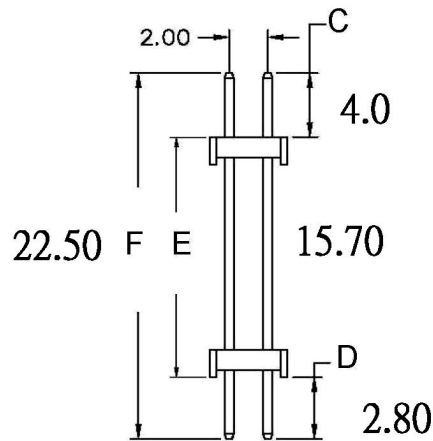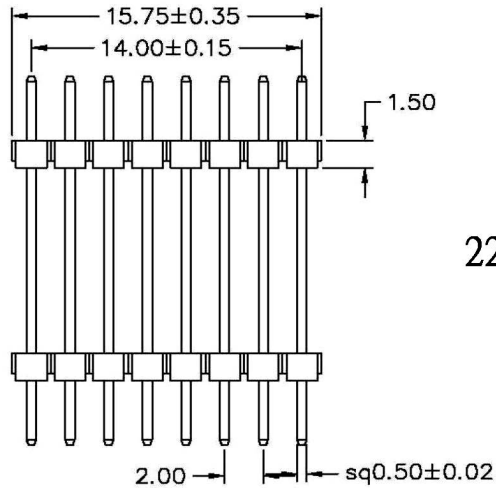

C=4.0mm, D=2.8mm, E=15.7 mm

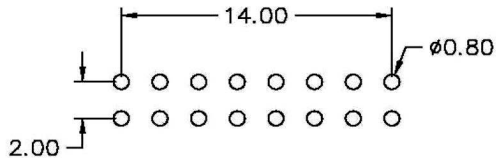

Recommended P.C.B Layout

RoHS Compliant		<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 參考	TOLERANCE ±0.00 ANG. ±0.05	PART NAME 品名 2.0mm PIN HEADER DUAL ROWS DUAL INSULATORS 2XXXP STRAIGHT TYPE H=1.5mm FULL GOLD PLATING (C=4.0mm D=2.8mm E=15.7mm F=22.5mm) ROHS
DWG. 製圖 IVY	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 C6215-XXFSGOC0R
DATE 制表日 2016/2/17	PAGE 張數 1 OF 1	REV. 版次 A	

1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H