
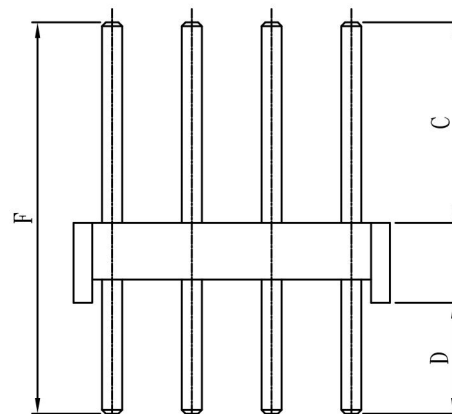


RECOMMENDED P. C. B LAYOUT

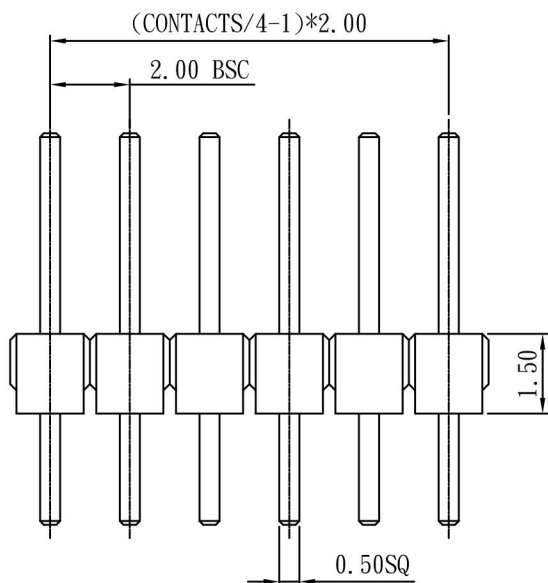

F: 8.18mm C: 3.63mm D: 3.05mm

| | |
|----------|------|
| CONTACTS | 4*16 |
| 4*2 | 4*17 |
| 4*3 | 4*18 |
| 4*4 | 4*19 |
| 4*5 | 4*20 |
| 4*6 | 4*21 |
| 4*7 | 4*22 |
| 4*8 | 4*23 |
| 4*9 | 4*24 |
| 4*10 | 4*25 |
| 4*11 | 4*26 |
| 4*12 | 4*27 |
| 4*13 | 4*28 |
| 4*14 | 4*29 |
| 4*15 | 4*30 |

MATERIAL

HOUSING: THERMOPLASTIC UL94V-0
CONTACT: COPPER ALLOYS

SPECIFICATION

CURRENT: 3A
OPERATING TEMPERATURE: -55°C to +105°C
CONTACT RESISTANCE: 20MILLIOHMS MAX.
INSULATION RESISTANCE: 1000MEGAOHMS MIN.
WITHSTANDING VOLTAGE: AC 1000V RMS

**RoHS
Compliant**

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

| | | | |
|-----------|--------|-----------|--------------|
| APPD. | | TOLERANCE | PART NAME 品名 |
| DWG. | | SCALE | |
| DATE | UNIT | SIZE. | PART NO. |
| 2017/4/18 | M M | A 4 | |
| | PAGE | REV. | |
| | 1 OF 1 | A | |