

Specifications

- Current Rating: 7.9Amp
- Insulation Resistance: 5000M Ω Min.
- Dielectric Withstanding: 1500V AC
- Contact Resistance: 20mΩ Max. \triangle
- Operating Temperature: -55°C to +125°C \triangle

MATERIAL:


\triangle -HOUSING: High Temperature Thermoplastic,
UL 94V-0 LCP or the equivalent material.
COLOR:BLACK.

-CONTACT:Phosphor Bronze

PLATING:

50u" Nickel UNDER PLATING ALL OVER,
100u" Matte Tin PLATING(FREE LEAD),

Recommended P.C.Board Layout
(Tolerance:±0.05)

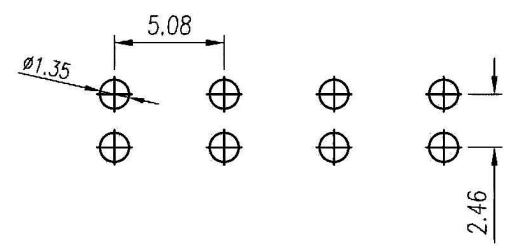

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	SCALE 比例 参考	GENERAL TOLERANCE X ⁺ ± 5.0° X ⁻ ± 0.30 .X ⁺ ± 3.0° X ⁻ ± 0.25 .XX ⁺ ± 2.0° XX ⁻ ± 0.15 .XXX ⁺ ± 1.0° .XXX ⁻ ± 0.10	PART NAME 品名 5.08mm POWER SOCKET H=8.9mm 1XXXPIN STRAIGHT TYPE MATTE TIN PLATING BLACK COLOR ROHS
DWG. 製圖 Betty			
DATE 制表日 2015/03/12	PAGE 張數 1 OF 1	REV. 版次 A	PART NO. 料號 C6900-XXASYHX0R