

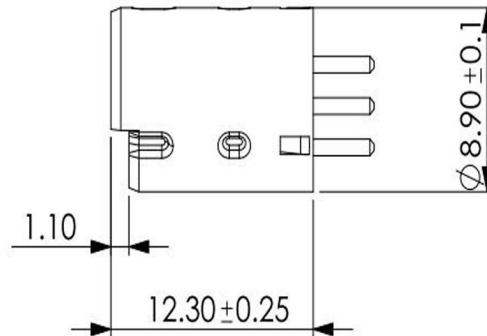


SECTION A-A

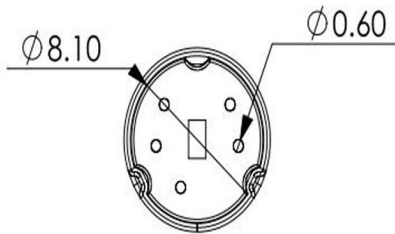

Specifications

rating :
 100V AC 1A MAX or 12V DC 2A MAX
 contact resistance :
 30mΩ MAX
 insulation resistance :
 MIN 50MΩ at 250V DC
 voltage withstand :
 250V AC, 1 minute
 operating temp : -25°C to +80°C

3	Terminals	Brass	Silver Ptd.	5
2	3P HOUSING	PBT		1
1	METAL SHIELD COVER	Brass	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 MINI DIN MOLDED TYPE 5P MALE MACHINED PIN W/SHORT SHELL (NICKEL PLATING) PIN: SILVER PLATED ROHS
DWG. 製圖 Betty	SCALE 比例 參考	SIZE 紙張尺寸 A 4	PART NO. 料號 C8010-05MBSVB0R
DATE 制表日 2016/04/29	UNIT 單位 M M	REV. 版次 A	
	PAGE 張數 1 OF 1		