


1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : PHOSPHOR BRONZE
 - 1-3. SHELL : BRASS
 - 1-4. SCREW : BRASS
2. FINISH :
 - 2-1. CONTACT : TIN PLATING OVER NICKEL
 - 2-2. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
 - 2-3. SCREW : NICKEL PLATED 60u" ~ 100u" OVER ALL
3. ELETRICAL SPECICATION :
 - 3-1. RATED CURRENT : 7.5A/DC MAX
 - 3-2. RATED VOLTAGE : 25V/DC MAX
4. ENVIRONMENTAL :
 - 4-1. OPERATION TEMPERATURE : -20 °~85°

RECOMMEND PANEL CUT-OUT

SCREW

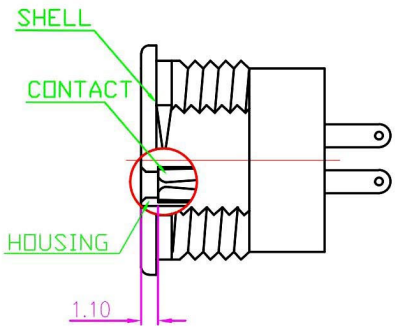

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.01 ANGULA ±1°	PART NAME 品名 POWER DIN JACK SCREW TYPE 4PIN FEMALE PIN:TIN PLATING WITH NUT BLACK COLOR ROHS
DWG. 製圖	UNIT 單位	SIZE 紙張尺寸	PART NO.
DATE 制表日	PAGE 張數	REV. 版次	C8026-04FTBY00R
Betty	M M	A 4	料號
2017/12/27	1 OF 1	A	