



PCB LAYOUT  
(BOTTOM VIEW)

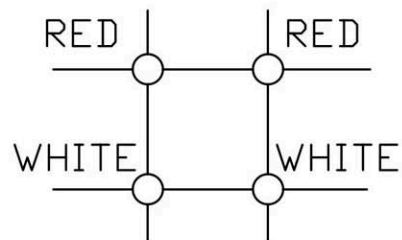

INSERT RING COLORS

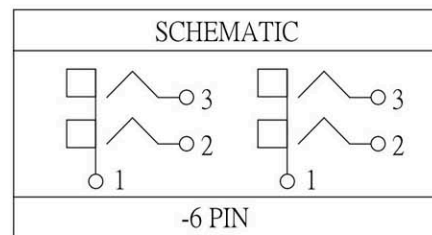

NO.	NAME	MATERIAL	FINISH	Q'TY
1	BARREL	BRASS 0.40	NICKEL PLATED	2
2	INSERT RING	PBT G.F.	RED.WHITE	4
3	COVER	ABS	BLACK	2
4	HOUSING	ABS	WHITE	1
5	TERMINAL	BRASS 0.50	TIN PLATED	2
6	TERMINAL	BRASS 0.50	TIN PLATED	2

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz.  
 Insulation Resistance: 100M Ohm Min. At 500V DC.  
 Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.  
 Dielectric Withstanding Voltage: 500VAC At 60Hz For 1 Minute.  
 Durability (Life Test): 4000 Cycles.  
 Insertion Force: 0.3~3.0 Kg.  
 Extraction Force: 0.3~3.0 Kg.

<b>RoHS</b> Compliant	<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>		<b>PART NAME 品名</b> RCA JACK 4 PORT STRAIGHT TIN PLATED RED RED/WHITE WHITE ROHS
	APPD. 核准 DWG. 製圖 DATE 制表日 2018/9/3	SCALE 比例 UNIT 單位 PAGE 張數 1 OF 1	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 3° SIZE 紙張尺寸 A4 REV. 版本 B