

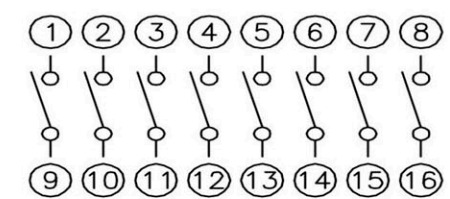
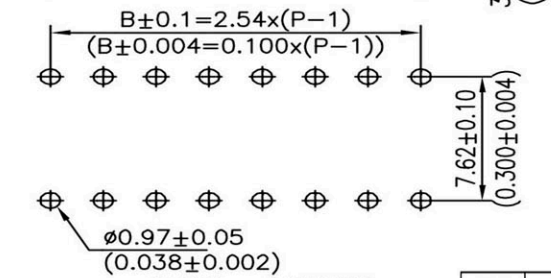
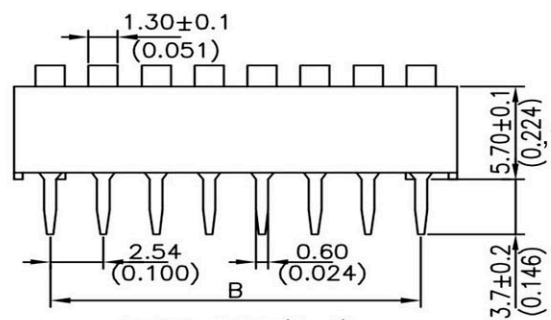


DIMENSION: (UNIT:mm/inches)

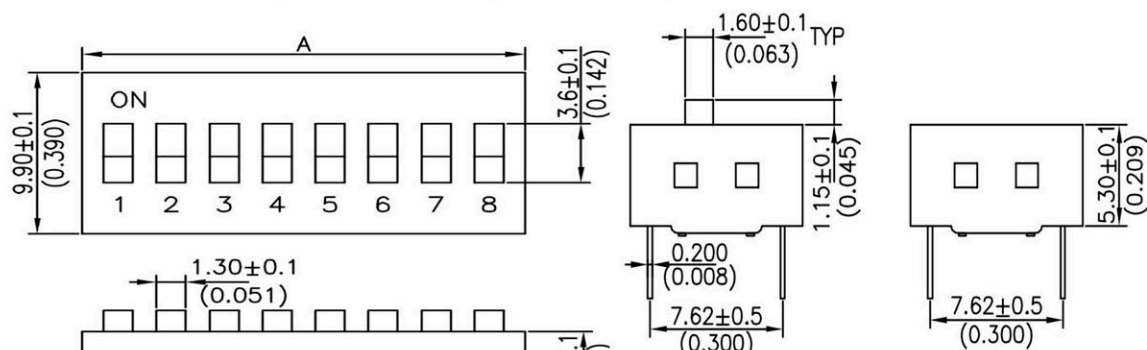

↑C8300-XXSLXJX0R ↑C8300-XXSSXJX0R

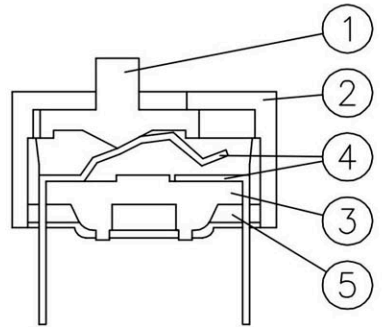

CONSTRUCTION

NO.OF POS	DIM.A	DIM.B
03	8.92(0.351)	5.08(0.200)
04	11.16(0.439)	7.62(0.300)
05	13.70(0.539)	10.16(0.400)
06	16.24(0.639)	12.70(0.500)
07	19.08(0.751)	15.24(0.600)
08	21.32(0.839)	17.78(0.700)
09	24.16(0.951)	20.32(0.800)
10	26.40(1.039)	22.86(0.900)
12	31.48(1.239)	27.94(1.100)

ELECTRICAL

1. Electrical Life: 2000 operation cycles per switch 24VDC, 25mA.
2. Non-switching Rating: 100mA, 50VDC.
3. Switching Rating: 25mA, 24VDC.
4. Contact Resistance: (a) 50mΩ max. at initial.
(b) 100mΩ max. after life test.
5. Insulation Resistance: 100MΩ min. at 500VDC.
6. Dielectric Strength: 500VAC/1 minute.

MECHANICAL

1. Mechanical life: 2000 operations per switch.
2. Operation Force: 800gf max.
3. Stroke: 2.0mm.
4. Operation Temp: - 25°C to 70°C
5. Storage Temp: - 40°C to 85°C

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	BLUE, RED.BLACK
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名 DIP SWITCH SLIDE TYPE XXP (LONG OR SHORT) KEY GOLD 3U" PLATING ROHS
DWG. 製圖	UNIT 單位	ANG. 參考	
DATE 制表日	PAGE 張數	SIZE. 紙張尺寸	PART NO. 料號
2017/10/31	1 OF 1	REV. 版本	

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H