



SECTION A-A

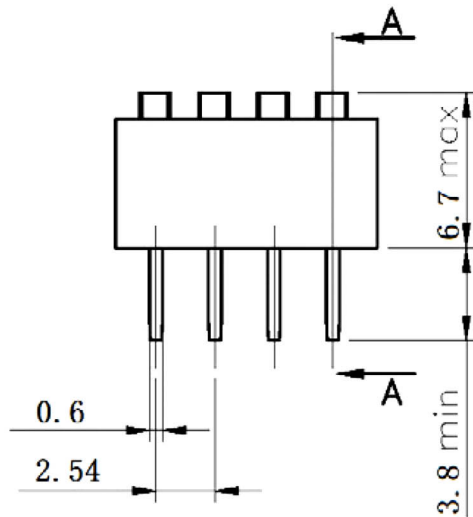

P. C. B LAYOUT

SPECIFICATION

Operation Force : 8N max. per switch.

Operation Temperature : $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Storage Temperature : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ELECTRICAL

Switching Rating : 25mA 24VDC

Non-Switching Rating : 100mA, 50VDC

Contact Resistance : 50mΩ max. at initial,
100mΩ After Testing

Insulation Resistance : 100mΩ , 500VDC

Dielectric Strength : 5pF max.

Mechanical Life : 1,000 operations per switch
(Test Under 24VDC & 25mA)

RoHS Compliant		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE × ±0.20 ×× ±0.15 ××× ±0.10 ×××× ±2° ××××× ±1° ×××××× ±0.5°	PART NAME 品名 2.54mm DIP SWITCH SLIDE TYPE ROW PITCH:7.8mm 4P LONG KEY WITHOUT TAPE SEALED GOLD 1U" PLATING BLUE INSULATOR ROHS
DWG. 製圖	Betty	SCALE 比例 參考	PART NO. 料號 C8301-04SLNWL0R
DATE 制表日	2017/12/21	UNIT 單位 M M PAGE 張數 1 OF 1	REV. 版次 A