

SECTION A-A

SPECIFICATION

Operation Force : 8N max. per switch.

Operation Temperature : -25°C ~ +70°C

Storage Temperature : -40°C ~ +85°C

ELECTRICAL

Switching Rating : 25mA 24VDC



Non-Switching Rating : 100mA, 50VDC

Contact Resistance : 50mΩ max. at initial,
100mΩ After Testing

Insulation Resistance : 100mΩ , 500VDC

Dielectric Strength : 5pF max.

Mechanical Life : 1,000 operations per switch
(Test Under 24VDC & 25mA)

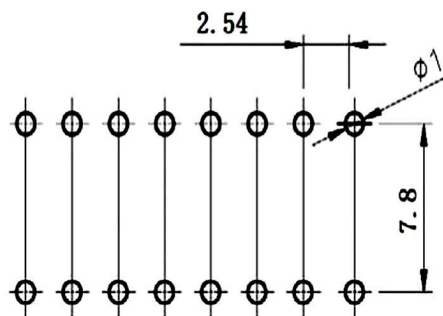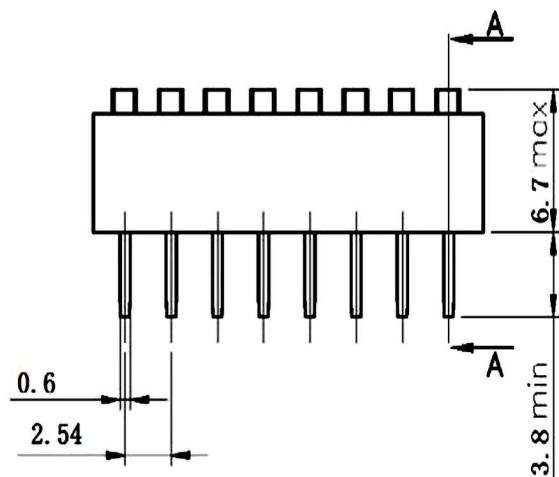

P. C. B LAYOUT

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE X. ±0.20 .X ±0.15 .XX ±0.10 X ±2° .X ±1° .XX ±0.5°	PART NAME 品名 DIP SWITCH SLIDE TYPE 8P LONG KEY W/O TAPE SEALED GOLD 1U" PLATING ROHS
DWG. 製圖 Betty	UNIT 單位 M M	SIZE 紙張尺寸 A 4	PART NO. 料號 C8301-08SLNWL0R
DATE 制表日 2016/04/13	PAGE 張數 1 OF 1	REV. 版次 A	