



NO. OF POS.	DIM. A	DIM. B
1	2.44[.096]	
2	4.98[.196]	2.54[.100]
3	7.52[.296]	5.08[.200]
4	10.06[.396]	7.62[.300]
5	12.60[.496]	10.16[.400]
6	15.14[.596]	12.70[.500]
7	17.68[.696]	15.24[.600]
8	20.22[.796]	17.78[.700]
9	22.76[.896]	20.32[.800]
10	25.3[0.996]	22.86[.900]
12	30.38[1.196]	27.94[1.100]

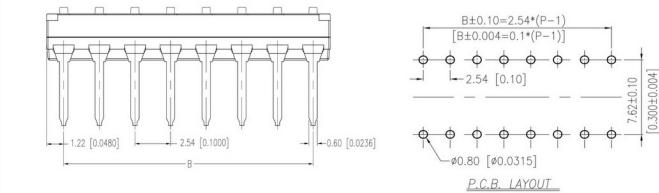

ITEM	DESC.	Q'TY	MATERIALS	TREATMENT	REMARK
1.	COVER	1	HIGH - TEMP THERMOPLASTIC PA-9T UL 94V-0	MOLDED BLACK	-
2.	CONTACT	*	COPPER	GOLD PLATED AT CONTACT AREA	-
3.	ACTUATOR	*	THERMOPLASTIC LCP UL 94V-0	MOLDED WHITE	-
4.	TERMINAL	1	BRASS	GOLD PLATED	-
5.	BASE	1	HIGH - TEMP THERMOPLASTIC PA9T UL 94V-0	MOLDED BLACK	-
6.	TAPE	1	KAPTON	-	-

RoHS Compliant

HSM 宏茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPR. 核准: BETTY

DWG. 製圖: BETTY

DATE 制表日: 2011/09/26

SCALE 比例: 1:1

UNIT 單位: MM

PAGE 頁數: 1 OF 1

SIZE 紙張尺寸: A4

REV. 版本: A

PART NAME 品名: 2.54mm DIP SWITCH END STACKABLE TYPE
XXP LONG KEY STRAIGHT TERMINAL
WITHOUT TAPE SEALED GOLD 3U' PLATING ROHS

PART NO. 料號: C8309-XXBLNJB0R