


建议胶圈尺寸

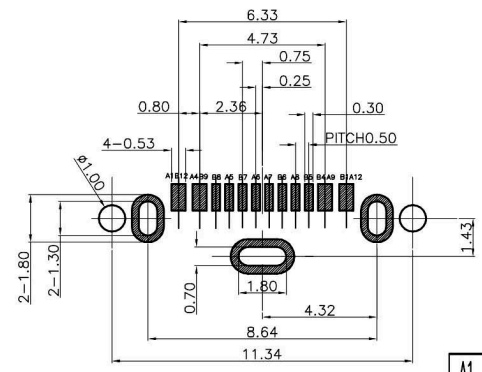

Recommend of PC Board Holes  
Tolerance : ±0.05(Top view)

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:  
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES

6	WATERPROOF RING	1	SILICA GEL	BLACK
5	SHELL	1	STAINLESS STEEL	Ni PLATED
4	SHIELDING PLATE	1	STAINLESS STEEL	Ni PLATED
3	CONTACT	1SET	COPPER ALLOY	NB:Ni Au PLATED
2	SHELL HOUSING	1	High temperature plastic	UL94V-0 BLACK
1	HOUSING	1	High temperature plastic	UL94V-0 BLACK
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant	<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
	APPD. 核准 DWG. 製圖 DATE 制表日 2022/06/24	比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1
SCALE 比例 UNIT 單位 M M PAGE 張數 1 OF 1	PART NAME 品名 USB TYPE C WATERPROOF TYPE 16P FEMALE VERTICAL 180° TYPE PIN FOOT:SMT TYPE WITH 3 DIP FEET GOLD FLASH PLATING BLACK COLOR PAD+REEL PACKING ROHS PART NO. 料號 C8681-16CFGYBQR	