



RATING: DC12V 50mA
 WITHSTAND VOLTAGE: AC250V(50Hz)/min
 CONTACT RESISTANCE: 100mΩ max
 INSULATION RESISTANCE: 100MΩ min
 TRAVEL TO CLOSURE: 0.25±0.1mm
 OPERATION FORCE: 160gf±50gf 250gf±50gf
 LIFE TEST: 100,000 cycles

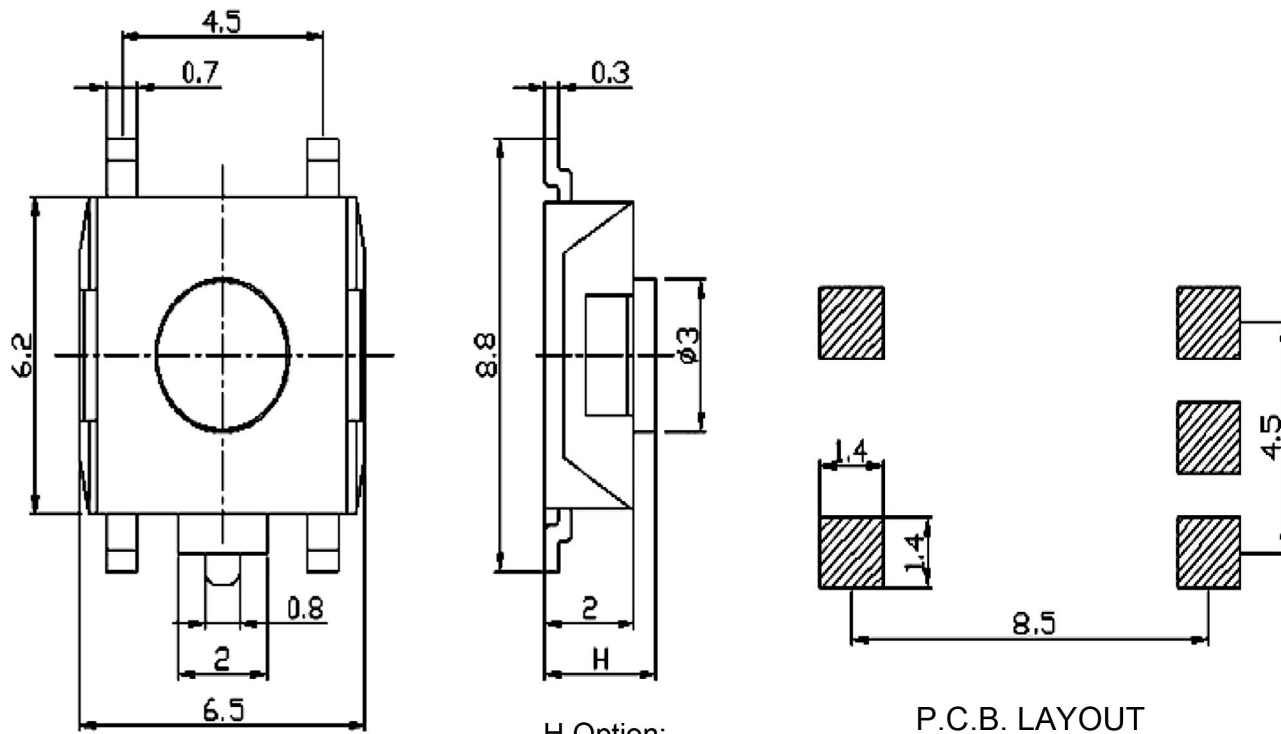

H Option:
 A=2.5mm
 B=2.7mm
 C=3.1mm
 D=3.8mm

P.C.B. LAYOUT

CIRCUIT DIAGRAM

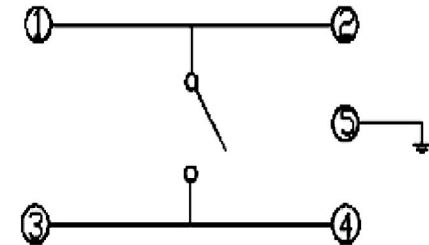

NO.	DESCRIPTION	MATERIAL	QTY.	PLATED
6				
5	TERMINAL	BRASS	4	Ag-PLATED
4	SPRING	PHOSPHOR BRONZE	1	
3	HOUSING	PA66	1	BLACK
2	COVER	SPCC	1	Ni-PLATED
1	KNOB	PA66	1	RED

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	Betty	SCALE 比例 參考	6.2X6.5mm TACT SWITCH SMT TYPE WITH GROUND PIN BUTTON COLOR: RED ROHS
DATE 制表日	2018/10/17	UNIT 單位 M M	PART NO.
		PAGE 張數 1 OF 1	料號 C8720-XXYRX000R
		REV. 版次 A	