


TYPE	H
A	4.3
F	4.5
B	5.0
K	6.0
U	6.5
C	7.0
D	8.0
M	8.5
S	9.0
E	9.5
W	10
Y	11
I	11.5
Z	12.0
J	13.0
O	15.0

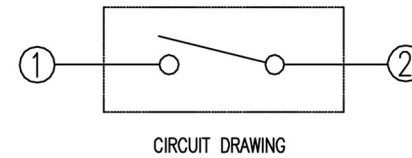

RATING: DC12V 50mA
 WITHSTAND VOLTAGE: AC250V(50Hz)/min
 CONTACT RESISTANCE: $\leq 100m\Omega$
 INSULATION RESISTANCE: $\geq 100M\Omega$
 TRAVEL TO CLOSURE: $0.25\pm 0.1mm$
 OPERATION FORCE: $250gf\pm 50gf$
 LIFE TEST: 100,000 cycles

7	WATERPROOF	1	SILICA GEL	BLACK
6	bracket	1	BRASS	PLATING Sn
5	SPRING	1	STAINLESS STEEL	PLATING SILVER
4	BUTTON	1	PA66	BLACK
3	COVER	1	PA66	BLACK
2	CONTACT	1	BRASS	PLATING SILVER
1	HOUSING	1	PA66	BLACK
ITEM	PART NAME	Q'TY/EA	MATERIAL	FINISH

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 DWG. 製圖 DATE 制表日 2019/01/10	SCALE 比例 UNIT 單位 M M PAGE 張數 1 / 1
PART NAME 品名 6.0X6.0mm IP67 WASHABLE TYPE TACT SWITCH RIGHT ANGLE TYPE KONB HEIGHT:XXmm OPERATING FORCE:250gf BUTTON COLOR:BLACK COLOR BAG PACKING ROHS		PART NO. 料號 C8726-XCBB0000R