


Recommended P.C. Board
SMD Layout

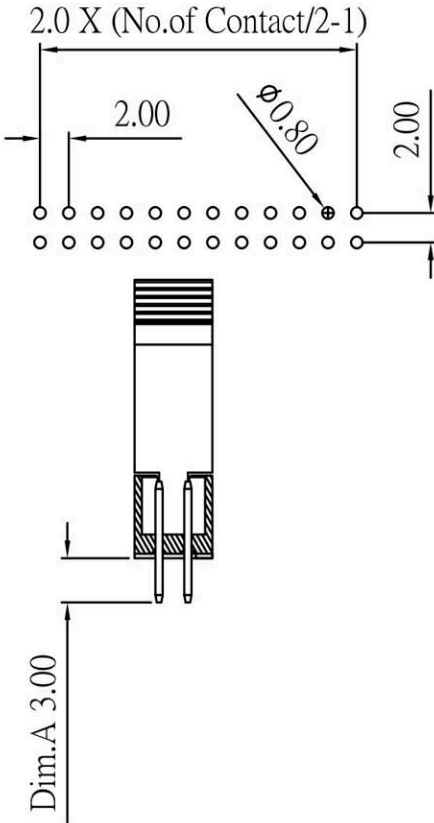

Current Rating and Voltage: 2 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Standard: Brass
 Insulator Material: Nylon-6T or Nylon-9T
 Plastic, UL 94V-0
 Max Processing Temp: 230° C for 60 seconds
 for Nylon-6T
 Max Processing Temp: 260° C for 10 seconds
 for Nylon-9T
 Finish: Standard: Gold Flash all over

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	<i>Helen</i>	0 ± 0.35 .00 ± 0.25 ANG. ± 5°	2.0MM X 2.0MM SHROUDED HEADER WITH LOCK 2X??PIN 180° LONG LATCH GOLD FLASH PLATING BLACK COLOR TRAY PACKING ROHS
DATE 制表日 2022/3/4	UNIT 單位 MM	SIZE. 紙張尺寸 A4	PART NO. 料號 C9003-XXSLGBXHR
PAGE 張數 1 OF 1	REV. 版本 A		