


Recommended P.C. Board Hole Layout

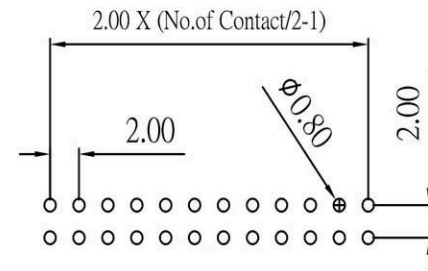

Current Rating and Voltage: 2 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Contact Material: Copper Alloy
 Standard: Brass
 Insulator Material: Nylon-6T or Nylon-9T
 Plastic, UL 94V-0
 Max Processing Temp: 230° C for 60 seconds
 for Nylon-6T
 Max Processing Temp: 260° C for 10 seconds
 for Nylon-9T
 Finish: Standard: Gold Flash all over

08~20 pin : 0.20 mm MAX.
 24~50 pin : 0.30 mm MAX.
 2.00 X (No. of Contacts/2) + 14.9 ± 0.20

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2022/3/4	SCALE 比例 UNIT 單位 PAGE 張數 1 OF 1	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 5° SIZE 紙張尺寸 A 4 REV. 版本 A	PART NAME 品名 2.0MM X 2.0MM SHROUDED HEADER WITH LOCK 2X??PIN 180° SHORT LATCH GOLD FLASH PLATING BLACK COLOR TRAY PACKING ROHS PART NO. 料號 C9003-XXSSGBXHR