
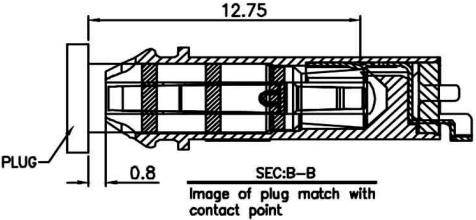


- SPECIFICATIONS:
- INSULATION RESISTANCE: A VOLTAGE OF 500V D.C. SHALL BE APPLIED TO THE TERMINALS, AFTER WHICH MEASUREMENT SHALL BE MADE. A GAUGE FOR THE MEASUREMENT SHALL BE USED THE INSULATED GAUGE.
 - CONTACT RESISTANCE: 30mΩ OR LESS
 - VOLTAGE PROOF: 500V AC FOR ONE MINUTE
 - DURABILITY: 10,000 INSERTION/REMOVAL CYCLES (MINIMUM)
 - INSERTION FORCE: 0.4KGF~2.0KGF
 - WITHDRAWAL FORCE: 0.4KGF~2.0KGF
 - WATER PROOFNESS: THIS PRODUCT IS CONFORM TO JIS STANDARD IPX7 BY WATERPROOF JACK
 - USING PLUG: Ø3.5MM, 4-POLE STEREO EARPHONE (LCH/RCH/GND/MIC) PROVIDED THAT THEY CONFORM TO JIS C6560
 - O-RING ASSEMBLY AREA TO MAINTAIN SMOOTH, SHALL HAVE NO BURRS



9	BOND	1			
8	TERMINAL	2	C2680	t=0.20	MB: Ni Gold Flash
7	TIP SPRING-2	5	Ti-Cu	t=0.20	MB: Ni Gold Flash
6	RING SPRING-2	4	Ti-Cu	t=0.20	MB: Ni Gold Flash
5	RING SPRING-1	3	Ti-Cu	t=0.20	MB: Ni Gold Flash
4	TIP SPRING-1	2	Ti-Cu	t=0.20	MB: Ni Gold Flash
3	EARTH SPRING	1	Ti-Cu	t=0.20	MB: Ni Gold Flash
2	COVER	1	PA9T		UL94V-0 BLACK
1	HOUSING	1	PA9T		UL94V-0 BLACK
LTR	PART NAME	QTY	MATERIAL		REMARK

T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-Top view)

SEC-A-A
Image of plug match with contact point

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SIZE 紙張尺寸	Φ3.5MM EARPHONE JACK WATERPROOF TYPE: IPX7
DATE 制表日	PAGE 張數	REV. 版次	SMT TYPE 5PIN (STEREO) W/O POST
2021/01/14	1 OF 1	A	GOLD FLASH PLATING BLACK COLOR
Betty			REEL PACKING ROHS
			PART NO.
			C9621-05NGABR0R
			料號