



Recommend of PC Board Holes  
Tolerance : ±0.05(Printed-Top view)

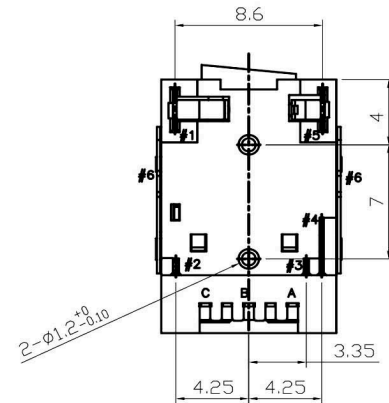

10	DRIVEIC	1		N/A
9	EARTH SPRING #6	1	COPPER ALLOY	Ni PLATED
8	RING SPRING-C #4	1	COPPER ALLOY	MB:Ni Gold Flash
7	RING SPRING-B #1	1	COPPER ALLOY	MB:Ni Gold Flash
6	EARTH SPRING #5	1	COPPER ALLOY	MB:Ni Gold Flash
5	TIP SPRING #2	1	COPPER ALLOY	MB:Ni Gold Flash
4	RING SPRING-A #3	1	COPPER ALLOY	MB:Ni Gold Flash
3	MINOR HOUSING	1	HIGH TEMP.THERMOPLASTIC	UL94V-0 BLACK
2	COVER	1	HIGH TEMP.THERMOPLASTIC	UL94V-0 BLACK
1	HOUSING	1	HIGH TEMP.THERMOPLASTIC	UL94V-0 BLACK
LTR	PART NAME	QTY	MATERIAL	REMARK

- Notes:
- Electrical Characteristics:
    - Rating : DC 30V 0.5 A ;
    - Contact Resistance: 50mΩ Max.(Initial), 100mΩ Max.(Final) After test: ≤50mΩ ;
    - Dielectric Withstanding Voltage: 500V AC for One Minute ;
    - Insulation Resistance: 100MΩ Min. Measured By 500 VDC;
  - Mechanical Characteristics:
    - Plug Insertion Force 0.3~3.0Kgf (initial), 0.3~3.0Kgf (Final) life test;
    - Plug Extraction Force: 0.3~3.0Kgf (initial), 0.3~3.0Kgf (Final) life test;
  - Durability Test: 5,000 Cycles min;
  - Operating temperature: -25°C ~ +70°C;
  - Soldering Heat Resistance Reflow Soldering 260°C;
  - Plug Interface Dimensions Conform To EIAJ RC-5325A Spec;



RoHS Compliant **HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	SCALE 比例 参考	TOLERANCE X.X ±0.30 X.X' ±3' X.XX ±0.25 X.XX' ±1' X.XXX ±0.20	PART NAME 品名 φ3.5MM AUDIO JACK+S/PDIF CONNECTOR RIGHT ANGLE TYPE WITH PLASTIC POST GOLD FLASH PLATING BLACK COLOR REEL PACKING ROHS
DWG. 製圖 Betty	UNIT 單位 M M	SIZE. 紙張尺寸 A 4	PART NO. C9626-RYGBR000R
DATE 制表日 2021/03/29	PAGE 張數 1 OF 1	REV. 版次 A	料號