



- Notes:
- Electrical Characteristics:
 - Rating : DC 30V 0.5 A ;
 - Contact Resistance: 30mΩ Max.(Initial),
Between plug and contact 100mΩ Max;
(Final) After Life test: ≤60mΩ ;
 - Dielectric Withstanding Voltage: 500V AC for One Minute ;
 - Insulation Resistance: 100MΩ Min. Measured By 500 VDC;
 - Mechanical Characteristics:
 - Plug Insertion Force 0.3~3.0Kgf (initial),
0.3~3.0Kgf (Final) life test;
 - Plug Extraction Force: 0.3~3.0Kgf (initial),
0.3~3.0Kgf (Final) life test;
 - Durability Test: 5,000 Cycles min;
 - Operating temperature:-25°C ~ +70°C;
 - Soldering Heat Resistance IR Reflow soldering 260°C ;
 - Plug Interface Dimensions Conform To EIAJ RC-5325A Spec;
 - Packaging: Tape Reel;

10	LOOP	1	COPPER ALLOY	Ni	PLATED
9	DRIVE IC	1	(TX)	N/A	
8	COVER	1	PA10T	UL-94V0	BLACK
7	MYLAR 2	1	(T=0.1)	AMBER	
6	MYLAR 1	1	(T=0.1)	AMBER	
5	HOUSING	1	PA10T	UL-94V0	BLACK
4	TERMINAL 4#	1	C5191R-EH t=0.20	MB: Ni	Gold Flash
3	TERMINAL 3#	1	C5191R-EH t=0.30	MB: Ni	Gold Flash
2	TERMINAL 2#	1	C5191R-EH t=0.20	MB: Ni	Gold Flash
1	TERMINAL 1#	2	C5191R-EH t=0.20	MB: Ni	Gold Flash
LTR	PART NAME	QTY	MATERIAL	REMARK	

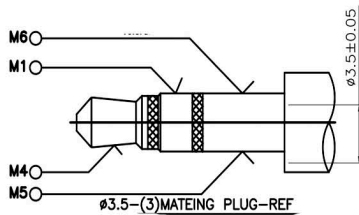

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准		TOLERANCE XX ±0.30 XX# ±3 XXX ±0.25 XXX# ±1 XXXX ±0.20	PART NAME 品名 ø3.5MM AUDIO JACK+SPIDF CONNECTOR OFFSET TYPE WITHOUT PLASTIC POST GOLD FLASH PLATING BLACK COLOR FILM+REEL PACKING ROHS
DWG. 製圖	Betty	UNIT 單位	PART NO. 料號
DATE 制表日	2021/03/29	M M PAGE 張數	
		1 OF 1	A 4 REV. 版次