


NO.	PIN	SCHEMATIC
C9734-CCNBX00R	∅2.0	
C9734-DCNBX00R	∅2.5	
C9734-FCNBX00R	∅1.65	

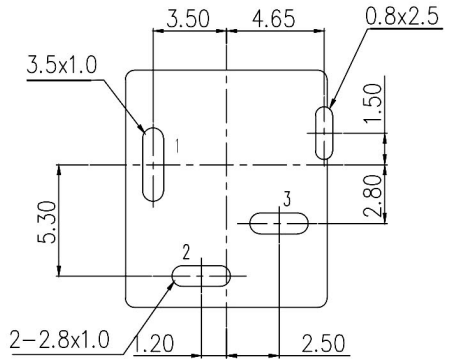

T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

8	MYLAR	1	POLYIMIDE TAPE	
7	HOUSING	1	PA9T	UL-94V0(BLACK)
6	COVER	1	PA9T	UL-94V0(BLACK)
5	SHELL	1	SUS301 t=0.20	Ni PLATED
4	CENTER PIN	1	H59(COPPER ALLOY)	Ni PLATED
3	SHUNT TERMINAL	1	C2680 t=0.30	Ag PLATED
2	TIP SPRING	1	C5191 t=0.30	Ag PLATED
1	CENTER PIN TERMINAL	1	C2680 t=0.40	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
Betty
DATE 制表日
2018/08/22

SCALE
比例 參考
UNIT
單位 M M
PAGE
張數 1 OF 1

PART NAME 品名
DC POWER JACK STRAIGHT TYPE
NORMAL CLOSE TYPE FLAT PIN NICKEL
PLATING WITH FILM BLACK COLOR ROHS
PART NO.
料號 C9734-XCNBX000R

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3