
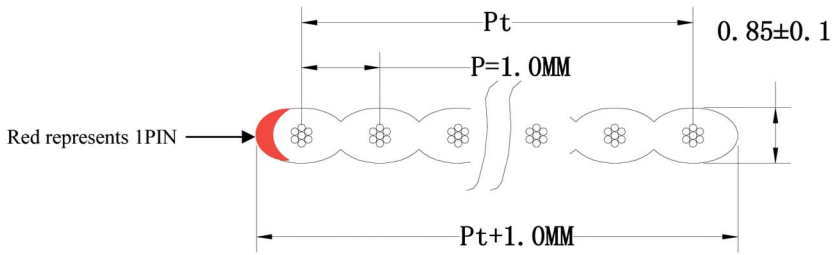


	1	2	3	4	5	6	7	8																																																																																																										
A	CONSTRUCTION TABLE																																																																																																																	
B	<table border="1"> <thead> <tr> <th rowspan="2">Number Of Cores</th> <th colspan="2">Size of conductor</th> <th rowspan="2">Thickness (±0.1 mm)</th> <th rowspan="2">Width</th> <th rowspan="2">Allowable Error(mm)</th> </tr> <tr> <th>(AWG)</th> <th>Composition±0.007mm</th> </tr> </thead> <tbody> <tr><td>08</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>8MM</td><td>±0.18</td></tr> <tr><td>09</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>9MM</td><td>±0.18</td></tr> <tr><td>10</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>10MM</td><td>±0.18</td></tr> <tr><td>12</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>12MM</td><td>±0.18</td></tr> <tr><td>14</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>14MM</td><td>±0.18</td></tr> <tr><td>16</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>16MM</td><td>±0.22</td></tr> <tr><td>18</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>18MM</td><td>±0.22</td></tr> <tr><td>20</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>20MM</td><td>±0.22</td></tr> <tr><td>24</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>24MM</td><td>±0.22</td></tr> <tr><td>25</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>25MM</td><td>±0.22</td></tr> <tr><td>26</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>26MM</td><td>±0.22</td></tr> <tr><td>30</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>30MM</td><td>±0.25</td></tr> <tr><td>34</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>34MM</td><td>±0.25</td></tr> <tr><td>40</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>40MM</td><td>±0.25</td></tr> <tr><td>44</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>44MM</td><td>±0.28</td></tr> <tr><td>50</td><td>28</td><td>7/0.127MM</td><td>0.85</td><td>50MM</td><td>±0.28</td></tr> </tbody> </table>						Number Of Cores	Size of conductor		Thickness (±0.1 mm)	Width	Allowable Error(mm)	(AWG)	Composition±0.007mm	08	28	7/0.127MM	0.85	8MM	±0.18	09	28	7/0.127MM	0.85	9MM	±0.18	10	28	7/0.127MM	0.85	10MM	±0.18	12	28	7/0.127MM	0.85	12MM	±0.18	14	28	7/0.127MM	0.85	14MM	±0.18	16	28	7/0.127MM	0.85	16MM	±0.22	18	28	7/0.127MM	0.85	18MM	±0.22	20	28	7/0.127MM	0.85	20MM	±0.22	24	28	7/0.127MM	0.85	24MM	±0.22	25	28	7/0.127MM	0.85	25MM	±0.22	26	28	7/0.127MM	0.85	26MM	±0.22	30	28	7/0.127MM	0.85	30MM	±0.25	34	28	7/0.127MM	0.85	34MM	±0.25	40	28	7/0.127MM	0.85	40MM	±0.25	44	28	7/0.127MM	0.85	44MM	±0.28	50	28	7/0.127MM	0.85	50MM	±0.28	<p>UL FLAT RIBBON WIRE UL Style:2651 Rated temperature:105°C Rated voltage:300Volts Passess VW-1 vertical flame test</p> <p>CONDUCTOR AWG size:28AWG Number of strands in each conductor: 7/0.127mm Tinned copper Lay of strands in each conductor: 0.005 inch at least minute Cross section area:156 Circular mil</p> <p>INSULATION Material of insulation: Polyvinl chloride(PVC)Gray Insulation thickness average:9mil Minimum insulation thickness:7mil</p> <p>CONSTRUCTION DRAWING</p>		<p>CABLE PHYSICAL PROPERTISE: After seven days air oven at 136°C Average tensile strength:1500 lbs/inch² Percent of original:70% at least Average elongation:200% Percent of original:65% at least</p> <p>ELECTRONIC CHARACTERISTICS Spark test:2500Volts Dielectric strength test:Minimum2000Volts in 1 minute Conductor resistance:Maximum237Ω/KM Insulation resistance: Maximum100MΩ/KM Capacity:40pF/M Inductance:1.45μH/M Impadance:100Ω Propagation delay time:4.2ns/m</p>	
Number Of Cores	Size of conductor		Thickness (±0.1 mm)	Width	Allowable Error(mm)																																																																																																													
	(AWG)	Composition±0.007mm																																																																																																																
08	28	7/0.127MM	0.85	8MM	±0.18																																																																																																													
09	28	7/0.127MM	0.85	9MM	±0.18																																																																																																													
10	28	7/0.127MM	0.85	10MM	±0.18																																																																																																													
12	28	7/0.127MM	0.85	12MM	±0.18																																																																																																													
14	28	7/0.127MM	0.85	14MM	±0.18																																																																																																													
16	28	7/0.127MM	0.85	16MM	±0.22																																																																																																													
18	28	7/0.127MM	0.85	18MM	±0.22																																																																																																													
20	28	7/0.127MM	0.85	20MM	±0.22																																																																																																													
24	28	7/0.127MM	0.85	24MM	±0.22																																																																																																													
25	28	7/0.127MM	0.85	25MM	±0.22																																																																																																													
26	28	7/0.127MM	0.85	26MM	±0.22																																																																																																													
30	28	7/0.127MM	0.85	30MM	±0.25																																																																																																													
34	28	7/0.127MM	0.85	34MM	±0.25																																																																																																													
40	28	7/0.127MM	0.85	40MM	±0.25																																																																																																													
44	28	7/0.127MM	0.85	44MM	±0.28																																																																																																													
50	28	7/0.127MM	0.85	50MM	±0.28																																																																																																													
C																																																																																																																		
D																																																																																																																		
E	<p>MARKING: PUYER  AWM 2651 28AWG E350147 105°C 300V VW-1 -LF-</p>																																																																																																																	
F																																																																																																																		
G	<table border="1"> <tr> <td colspan="2"> <p>RoHS Compliant</p> </td> <td colspan="6"> <p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p> </td> </tr> <tr> <td> <p>APPD. 核准</p> </td> <td> <p>DWG. 製圖 Hedy</p> </td> <td> <p>DATE 制表日 2016/08/03</p> </td> <td> <p>SCALE 比例 參考</p> </td> <td> <p>UNIT 單位 M M</p> </td> <td> <p>PAGE 張數 1 / 1</p> </td> <td> <p>TOLERANCE 容許公差 .0 ± .00 ± ANG. ±</p> </td> <td> <p>SIZE. 紙張尺寸 A 4</p> </td> <td> <p>REV. 版次 A</p> </td> <td> <p>PART NAME 品名 FLAT CABLE 1.0mm UL2651GREY COLOR XXP 28AWG 1ROLL=XXXFEET ROHS</p> </td> <td> <p>PART NO. 料號 F0802-XXPXF000R</p> </td> </tr> </table>								<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>						<p>APPD. 核准</p>	<p>DWG. 製圖 Hedy</p>	<p>DATE 制表日 2016/08/03</p>	<p>SCALE 比例 參考</p>	<p>UNIT 單位 M M</p>	<p>PAGE 張數 1 / 1</p>	<p>TOLERANCE 容許公差 .0 ± .00 ± ANG. ±</p>	<p>SIZE. 紙張尺寸 A 4</p>	<p>REV. 版次 A</p>	<p>PART NAME 品名 FLAT CABLE 1.0mm UL2651GREY COLOR XXP 28AWG 1ROLL=XXXFEET ROHS</p>	<p>PART NO. 料號 F0802-XXPXF000R</p>																																																																																							
<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>																																																																																																																
<p>APPD. 核准</p>	<p>DWG. 製圖 Hedy</p>	<p>DATE 制表日 2016/08/03</p>	<p>SCALE 比例 參考</p>	<p>UNIT 單位 M M</p>	<p>PAGE 張數 1 / 1</p>	<p>TOLERANCE 容許公差 .0 ± .00 ± ANG. ±</p>	<p>SIZE. 紙張尺寸 A 4</p>	<p>REV. 版次 A</p>	<p>PART NAME 品名 FLAT CABLE 1.0mm UL2651GREY COLOR XXP 28AWG 1ROLL=XXXFEET ROHS</p>	<p>PART NO. 料號 F0802-XXPXF000R</p>																																																																																																								
H																																																																																																																		
	1	2	3	4	5	6	7	8																																																																																																										