

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D

D

E

E

F


F

G

G

H

H

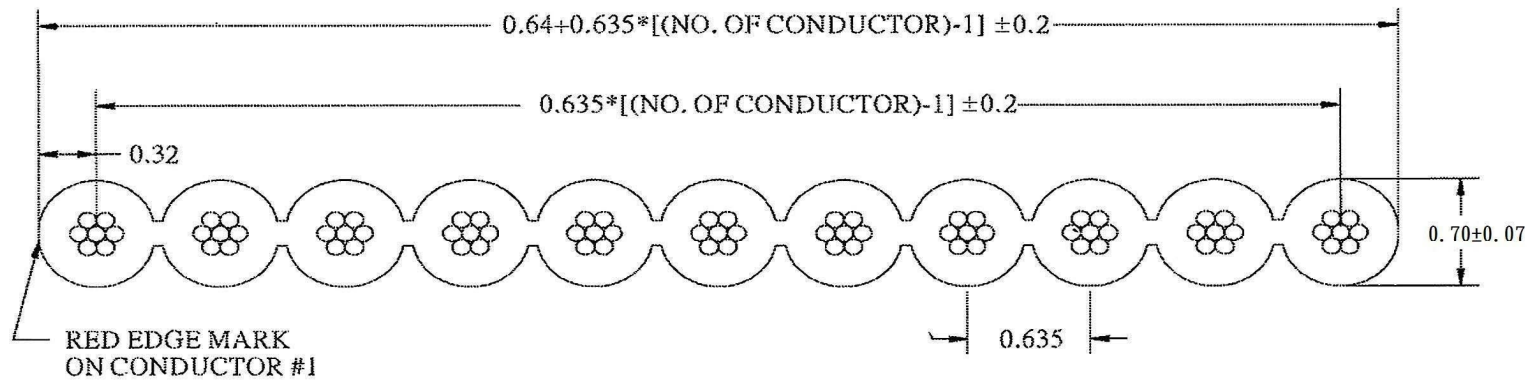

UL Style : 2678
 Operating Temperature : -20°C to +105°C
 Flammability Rating : UL-VW-1
 Voltage Rating : 150V

Physical

Insulation Material : Polyvinyl Chloride (PVC)
 Conductor : #30AWG (7*0.102) Stranded Tinned Copper

Color : Grey With Red Edge

Electrical

Impedance : 75Ω (Unbalanced)
 Capacitance : 22.5 pF/ft.
 Inductance : .317 μH/ft
 Propagation Delay : 1.7 ns/ft.
 Insulation Resistance : 1GΩ/M min.

F 0803 — 68 P A A F 0 0 R
 1 2 3 4 5 6 7 8 9 10

- | | | | |
|--|--|---------------------|---|
| 1. PRODUCTS:
F: Flat Cable | 5. CONDUCTOR OPTION:
A: Stranded Tinned Copper
B: Stranded Silver Copper
C: Solid Bare Copper
D: Solid Tinned Copper
E: Solid Silver Copper | 7. UNIT:
F: Feet | 8. FILL IT WITH "0"
9. FILL IT WITH "0"
10. R: ROHS |
| 2. SERIES NO.:
0803 | 6. CABLE LENGTH:
A: 100
B: 250
C: 350
D: 500 | | |
| 3. CONTACT NO.:
10-80 | | | |
| 4. INSULATOR MATERIAL:
P: PVC
T: TPE | | | |

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准 DWG. 製圖 Betty DATE 製表日 2013/06/10	TOLERANCE 容許公差 .0 ± 0.05 .00 ± ANG. ± SIZE. 紙張尺寸 A 4 REV. 版次 B
SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1		

1 2 3 4 5 6 7 8