


NOTES

- * Poles: 2-30,40
- * Material: NYLON66 UL94-V0 BLACK



Specifications

- * Current rating: 1A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute

CIRCUITS	DIM. A	DIM. B
2	2.00	4.3
3	4.00	6.3
4	6.00	8.3
5	8.00	10.3
6	10.00	12.3
7	12.00	14.3
8	14.00	16.3
9	16.00	18.3
10	18.00	20.3
11	20.00	22.3
12	22.00	24.3
13	24.00	26.3
14	26.00	28.3
15	28.00	30.3
16	30.00	32.3
17	32.00	34.3
18	34.00	36.3
19	36.00	38.3
20	38.00	40.3
21	40.00	42.3
22	42.00	44.3
23	44.00	46.3
24	46.00	48.3
25	48.00	50.3
26	50.00	52.3
27	52.00	54.3
28	54.00	56.3
29	56.00	58.3
30	58.00	60.3
40	78.00	80.3

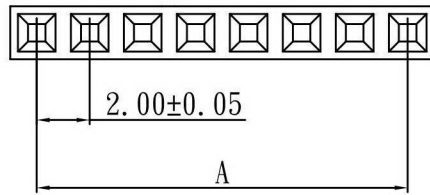

A&B DIM. TOLERANCE
 2P~10P±0.15
 11P~20P±0.25
 21P~30P±0.35

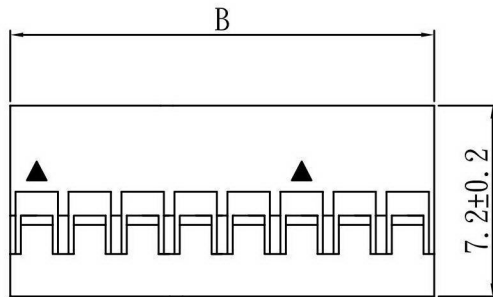

		玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD.	SCALE	TOLERANCE	PART NAME 品名
DWG. Helen	参考	.0 ±0.25 .00 ±0.2 ANG. ±	2.0mm HOUSING SINGLE ROW 1*XXP BLACK COLOR NYLON66 UL94-V0 ROHS
DATE 2016/1/14	UNIT M M	SIZE A 4	PART NO.]H1002-XXPSB004R
	PAGE 1 OF 1	REV. B	料 號