

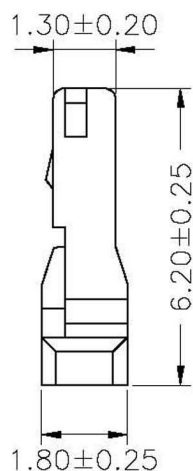
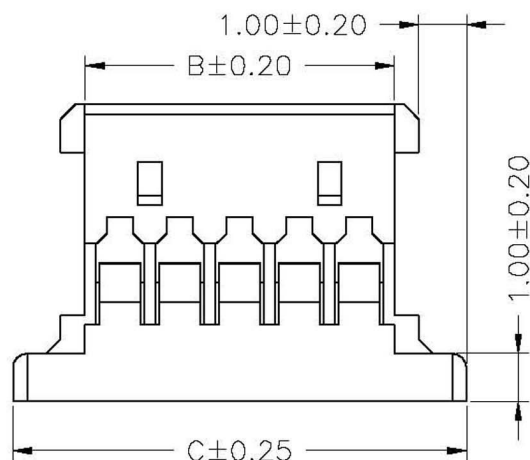


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(Beige)

Ordering Information & Dimensions

PIN	Dimensions		
	A	B	C
02P	1.25	2.72	5.72
03P	2.50	3.97	6.97
04P	3.75	5.22	8.22
05P	5.00	6.47	9.47
06P	6.25	7.72	10.72
07P	7.50	8.97	11.97
08P	8.75	10.22	13.22
09P	10.00	11.47	14.47
10P	11.25	12.72	15.72
11P	12.50	13.97	16.97
12P	13.75	15.22	18.22
14P	16.25	17.72	20.72
15P	17.50	18.97	21.97

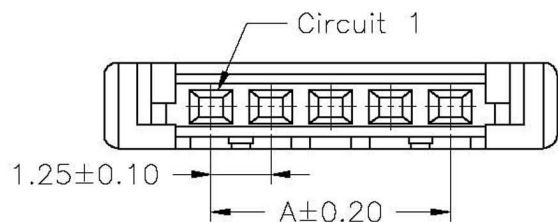

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2010/10/23	Helen	TOLERANCE 容許公差 .0 ±0.25 .00 ±0.15 ANG. ± UNIT 單位 M M PAGE 張數 1 OF 1	PART NAME 品名 1.25mm HOUSING XXP WHITE ROHS LOW-LEAD PART NO. 料號 H1257-XXPW0000R