


NOTES:
 CURRENT RATING: 1.5A AC/DC.
 VOLTAGE RATING: 15V AC/DC.
 TEMPERATURE RANGE: -25°C~+85°C.
 CONTACT RESISTANCE: 20mΩ MAX.
 INSULATION RESISTANCE: 1000MΩ MIN.
 WITHSTANDING VOLTAGE: 500V AC/MINUTE.
 MATERIAL: PBT+15%GF UL94V-0 .
 FLASH: 0.05MAX; WARPAGE: 0.08MAX.
 MARK * INDICATE DIMENSIONS NEED TO CONTROLLED IN QIP.
 MARK (XX) INDICATE DIMENSIONS NEED TO CONTROLLED IN FAI.

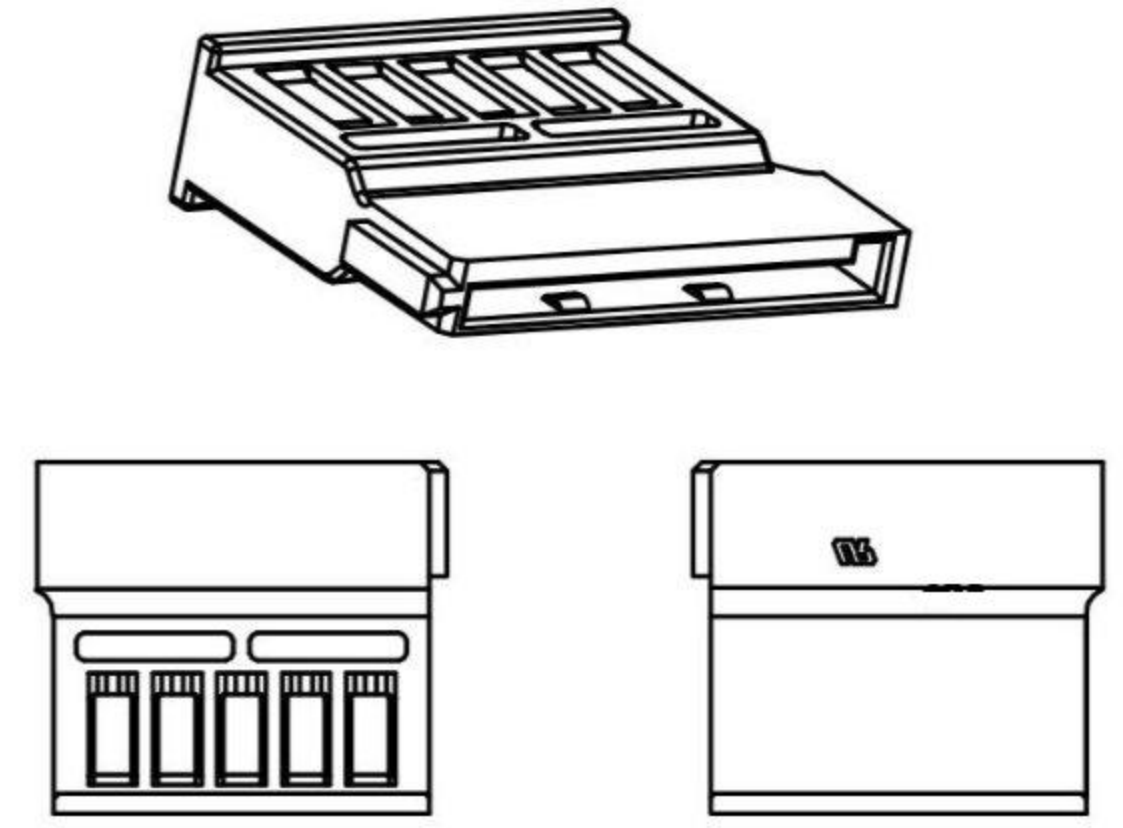

RoHS Compliant **HSM** 玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

DIM	TOL	DIM	TOL
X.	/	X°.	/
X.X	±0.15	X.X°.	±2°
X.XX	±0.10	X.XX°.	±1°
X.XXX	±0.05	X.XXX°.	/

APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差
DWG. 製圖 HELEN	UNIT 單位 MM	.0 ±
DATE 制表日	PAGE 張數 1 OF 1	.00 ±
2011/9/16	REV. 版本 A	ANG. ±
		SIZE. 紙張尺寸 A4

PART NAME 品名	PART NO. 料號
1.27mm CRIMP TERMINAL HOUSING 15P BLACK INSULATOR ROHS (*SATA HOUSING)	H1270-15PB0000R