
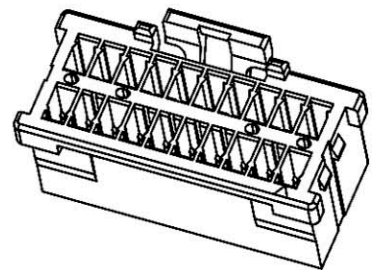


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

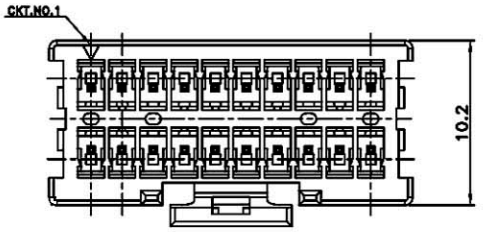


20PIN 3D VIEW

■ SPECIFICATIONS


- Current Rating : 3.0A AC/DC
- Withstanding Voltage : 1,000V AC/minute
- Insulation Resistance : 1,000MΩ min.
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max.

■ HOUSING


- Poles : 4x2~20x2
- Material : Nylon 66 UL94V-0 Color : White
- Q'ty: 1,000 Pcs/Bag

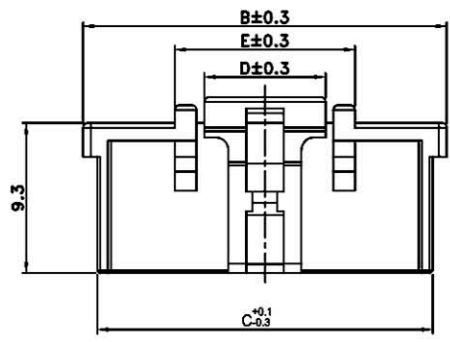



6X2~20X2 PIN




4X2~5X2 PIN

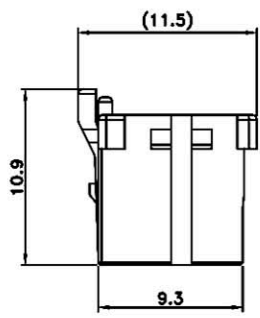

Poles	Dimension(mm)				
	A	B	C	D	E
4x2	6.0	11.4	9.6	4.7	8.4
5x2	8.0	13.4	11.6	4.7	8.4
6x2	10.0	15.4	13.6	7.8	11.6
7x2	12.0	17.4	15.6	7.8	11.6
8x2	14.0	19.4	17.6	7.8	11.6
9x2	16.0	21.4	19.6	7.8	11.6
10x2	18.0	23.4	21.6	7.8	11.6
11x2	20.0	25.4	23.6	7.8	11.6
12x2	22.0	27.4	25.6	7.8	11.6
13x2	24.0	29.4	27.6	7.8	11.6
14x2	26.0	31.4	29.6	7.8	11.6
15x2	28.0	33.4	31.6	7.8	11.6
16x2	30.0	35.4	33.6	7.8	11.6
17x2	32.0	37.4	35.6	7.8	11.6
18x2	34.0	39.4	37.6	7.8	11.6
19x2	36.0	41.4	39.6	7.8	11.6
20x2	38.0	43.4	41.6	7.8	11.6

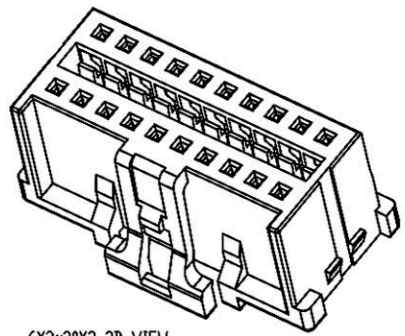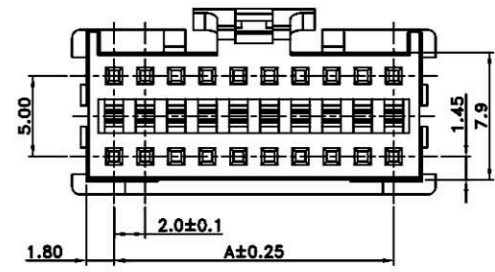

6X2~20X2 3D VIEW

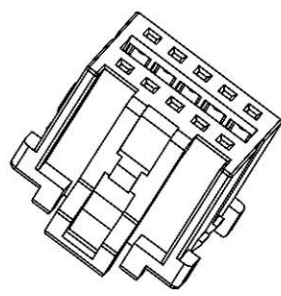

4X2~5X2 3D VIEW

<p>RoHS Compliant</p>		<p>HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.</p>	
<p>APPD. 核准 Betty</p>	<p>DWG. 製圖 Lena</p>	<p>DATE 制表日 2022/3/8</p>	<p>PART NAME 品名 2.0mm X 5.0mm HOUSING 2XXXP WHITE COLOR NYLON66 UL94V-0 ROHS</p>
<p>SCALE 比例 參考</p>	<p>UNIT 單位 MM</p>	<p>PAGE 張數 1 OF 1</p>	<p>PART NO. 料號 H2014-XXPDW000R</p>
<p>TOLERANCE 0 ± 0.3 .00 ± 0.2 .000 ± 0.1 0° ± 1'</p>	<p>SIZE. 紙張尺寸 A 4</p>	<p>REV. 版本 B</p>	

1 2 3 4 5 6 7 8