




A-A SECTION

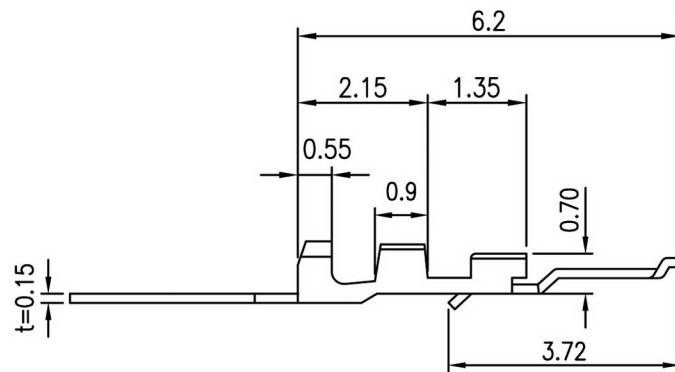

B-B SECTION

■ **TERMINAL**

- Material: Phos. bronze
- Thickness: 0.15mm
- Plating: Gold plated
- Wire Range: Suitable for AWG#28~32
- Insulation O.D: 0.8mm (max)
- Q'TY: 15,000 pcs/reel

Specification:
 Current Rating: 1A(max) AC,DC
 Voltage Rating: 200V (max) AC,DC.
 Operating Temp: -40°C~+85°C.
 Insulation Resistance: 100MΩ min.
 Dielectric Withstanding Voltage: 500V AC 1 min.
 Contact Resistance: 40mΩ max.

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	Hedy	LINEAR ± .0 ±0.25 .00 ±0.15 .000 ±0.08	1.0mm LVDS TERMINAL
DATE 制表日	2017/08/29	ANGLES ± 2°	MATERIAL : PHOSPHOR BRONZE GOLD FLASH PLATING SUITABLE FOR 28~32AWG ROHS
		SCALE 比例 參考	PART NO.
		UNIT 單位 MM	料號 T9011-GPP00000R
		PAGE 張數 1 / 1	
		REV. 版次 A	