
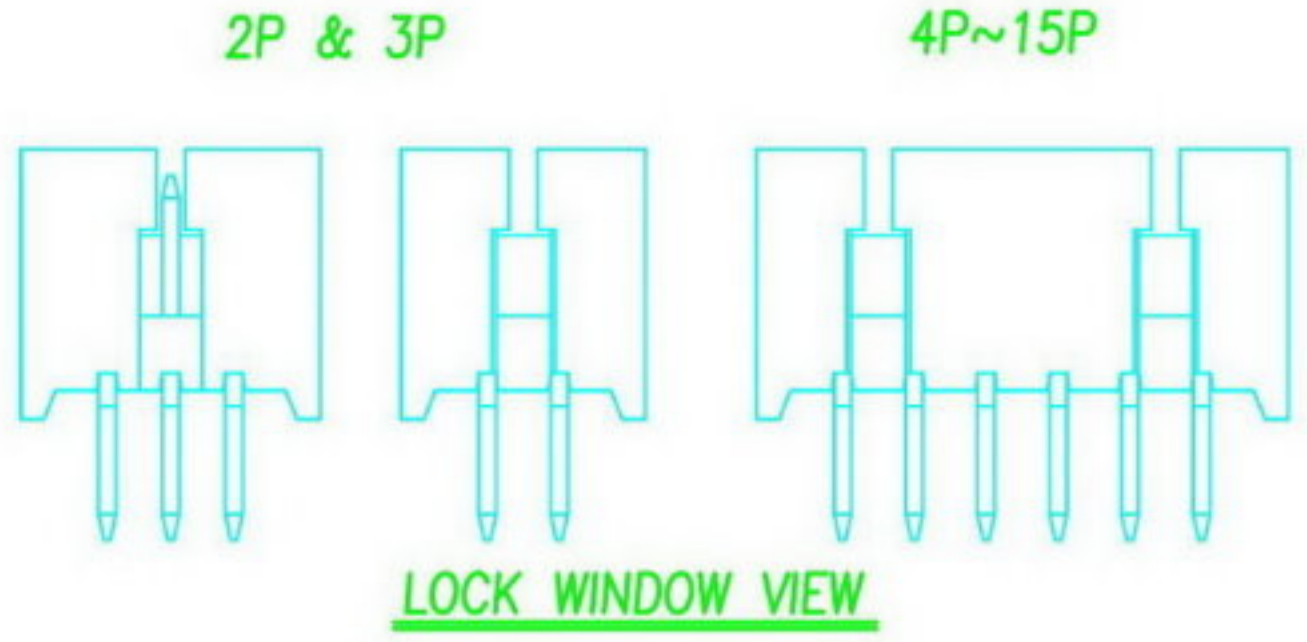


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H



A
B
C
D
E
F
G
H

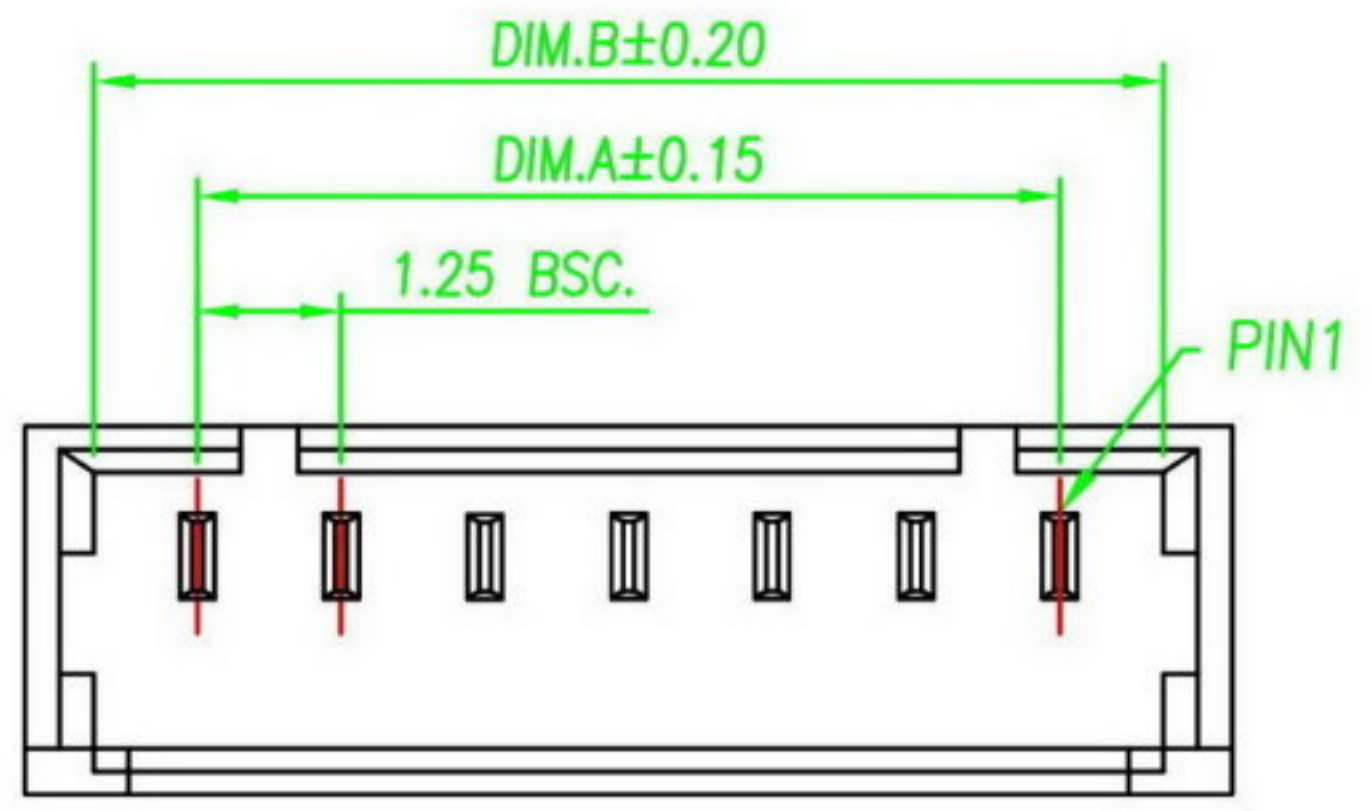

Specification
 1.Current Rating:1A
 2.Voltage Rating:125V AC
 3.Contact Resistance:20mΩ Max.(Initial) 40mΩ Max.(Final)
 4.Insulation Resistance:100MΩ Min. At 500V
 5.Dielectric Withstanding Voltage:AC 250V/Minute
 6.Operating Temperature:-25°C~+85°C


Material:
 1.Housing:High Temperature thermoplastic UL94V-0
 2.Contact Pin:Copper Alloy t=0.30mm

Finish:
 1.Housing:NY46 UL94V-0 Nature
 2.Contact Pin:Tin Plated Over Nickel.

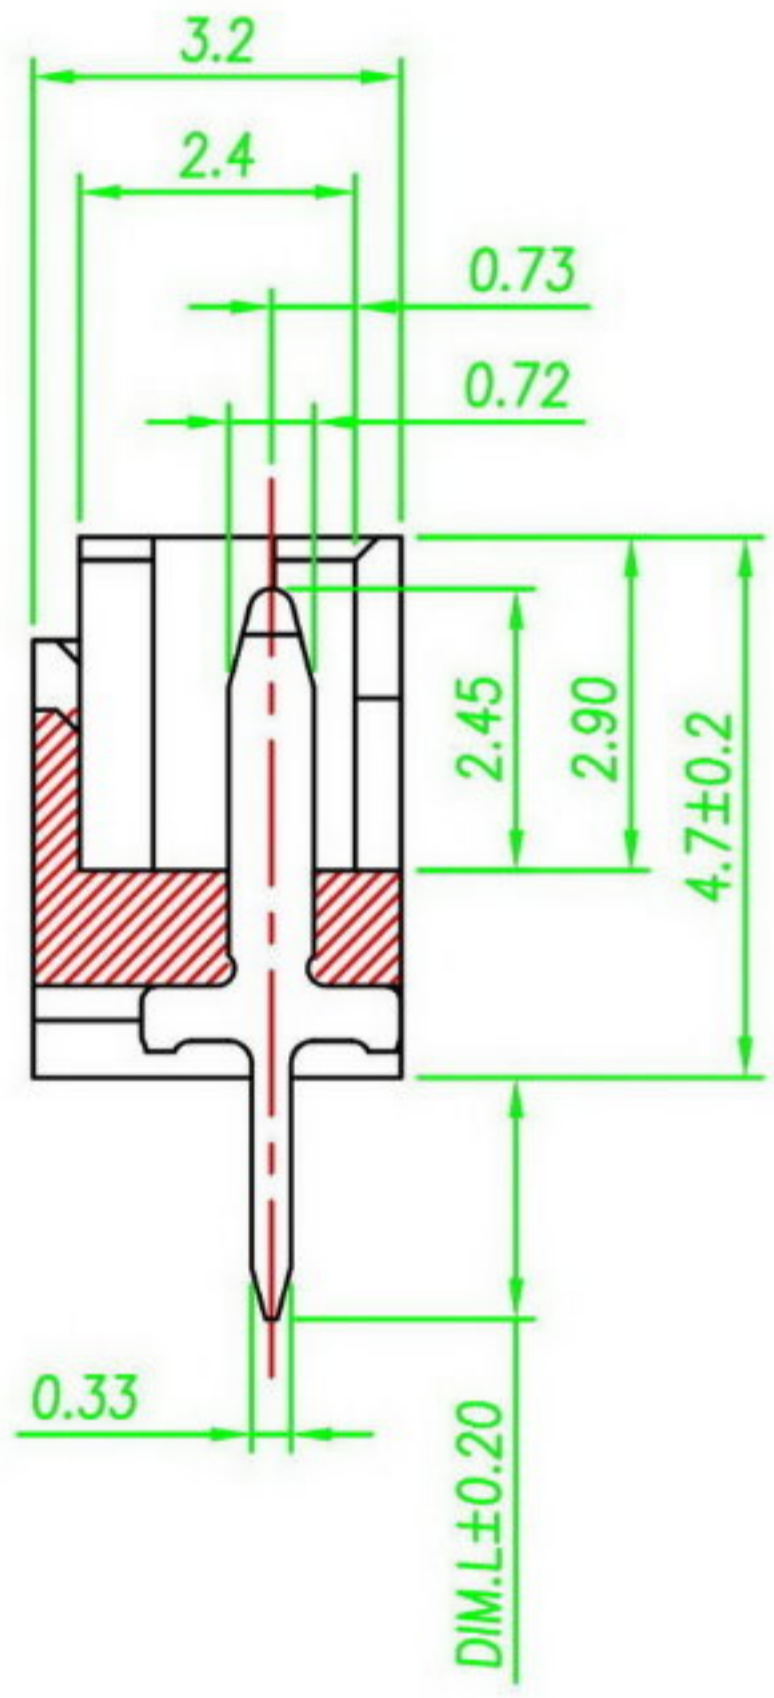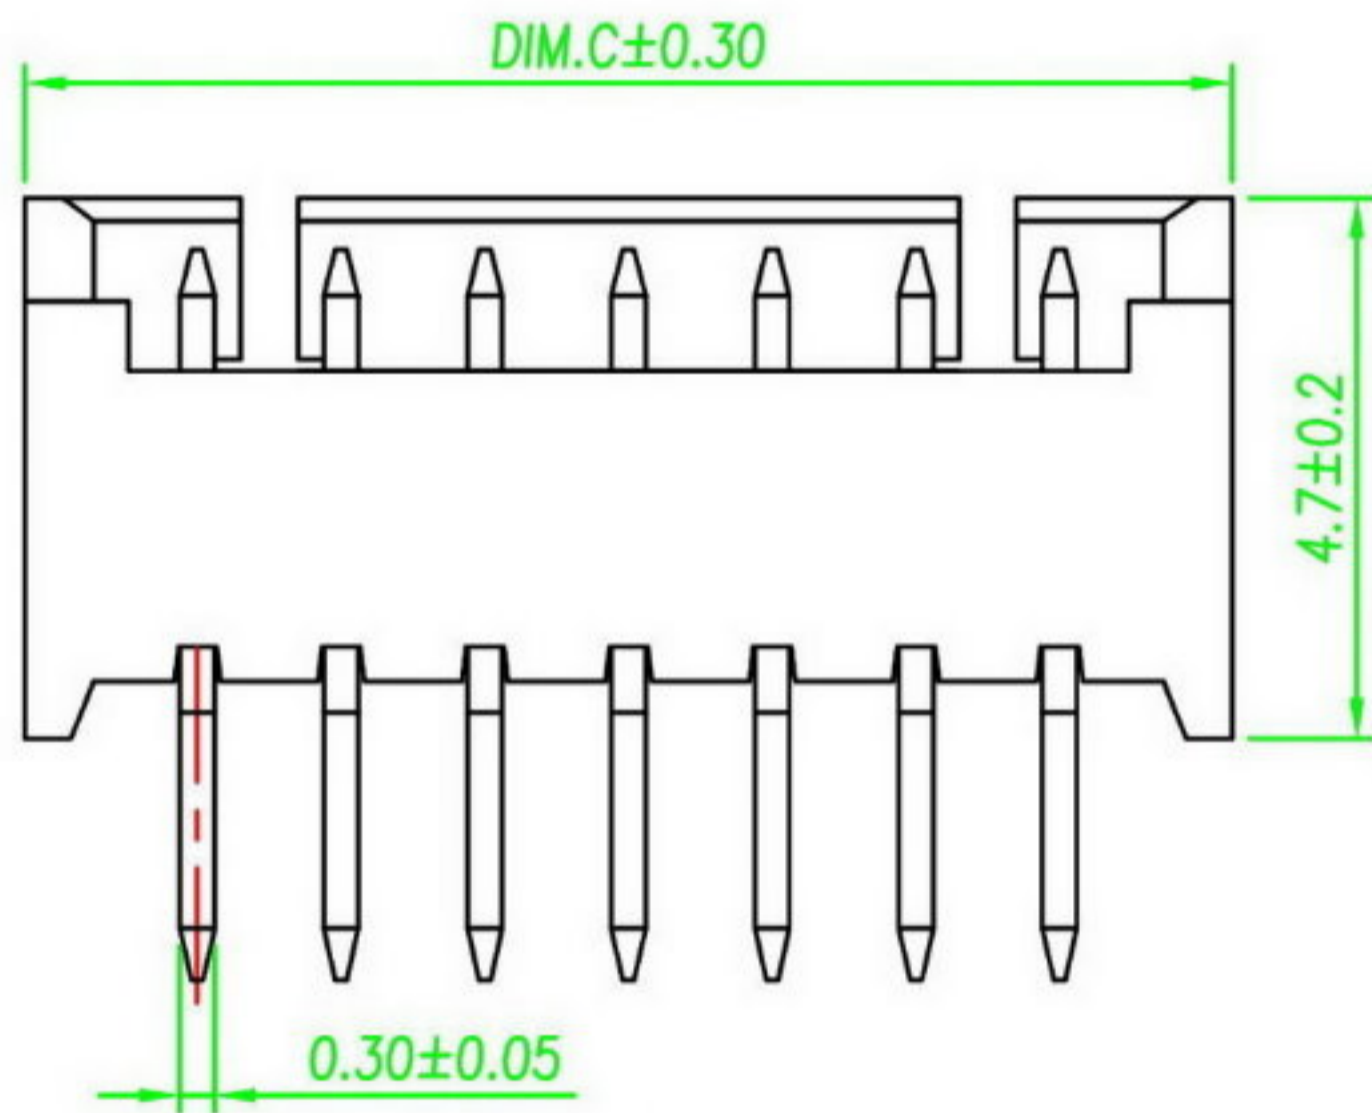

L= 2.1 mm

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	1.25	3.05	4.25	09	10.00	11.80	13.00
03	2.50	4.30	5.50	10	11.25	13.05	14.25
04	3.75	5.55	6.75	11	12.50	14.30	15.50
05	5.00	6.80	8.00	12	13.75	15.55	16.75
06	6.25	8.05	9.25	13	15.00	16.80	18.00
07	7.50	9.30	10.50	14	16.25	18.05	19.25
08	8.75	10.55	11.75	15	17.50	19.30	20.50

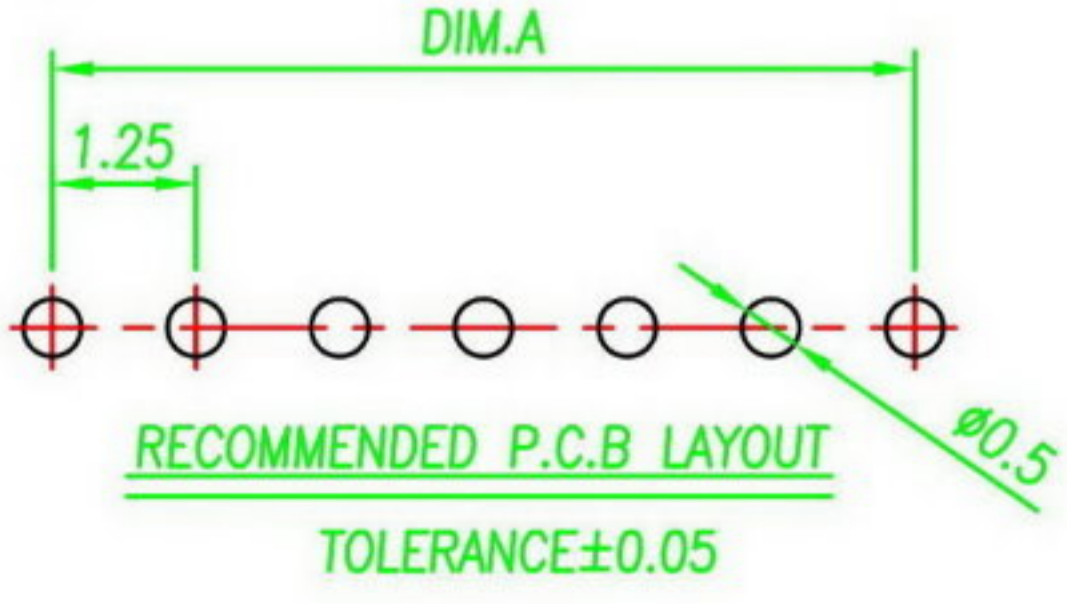

RoHS Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	 TOLERANCE 容許公差 X.XX ± 0.15 SCALE 比例 參考 X.X ± 0.25 UNIT 單位 MM SIZE 紙張尺寸 A4 PAGE 張數 1 / 1 REV. 版次 B	PART NAME 品名 1.25mm WAFER 1XXXP STRAIGHT TIN PLATING BEIGE COLOR ROHS
DWG. 製圖 ABBY		PART NO. 料號 W1125-XXPSTXC0R
DATE 制表日 2016/12/12		

1 2 3 4 5 6 7 8