


Specification
 1.Voltage Rating:50V AC/DC
 2.Current Rating:2A AC/DC, AWG#28~30
 3.Contact Resistance:10mΩ Max.
 4.Insulation Resistance:100MΩ Min.
 5.Dielectric Withstanding Voltage: 500 VAC Minute
 6.Operating Temperature:-55℃~85℃

Material:
 1.Housing:High Temperature Thermoplastic UL94V-0
 2.Contact:Copper Alloy T=0.20mm
 Gold Flash Over Nickel.
 3.Tab:Copper Alloy T=0.25mm Nickel Plated

Pin	DIM.A	DIM.B	DIM.C	DIM.D
02	4.20	2.60	1.20	3.50
03	5.40	3.80	2.40	4.70
04	6.60	5.00	3.60	5.90
05	7.80	6.20	4.80	7.10
06	9.00	7.40	6.00	8.30

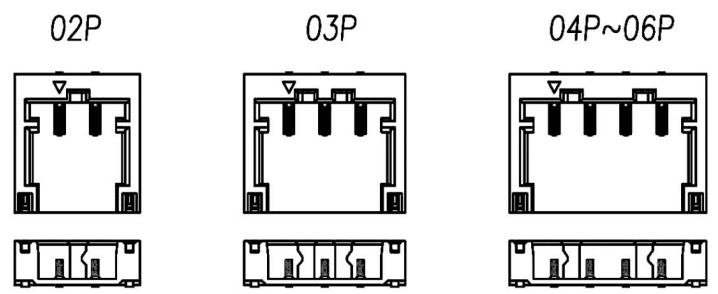

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty		TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3°	PART NAME 品名 1.2mm WAFER SMT RIGHT ANGLE TYPE 1XXXP GOLD FLASH PLATING BLACK COLOR NYLON66 UL94-V0 ROHS
DWG. 製圖 Betty	SCALE 比例 參考	SIZE. 紙張尺寸 A 4	PART NO. 料號 W1200-XXPBGB1XR
DATE 制表日 2013/12/16	UNIT 單位 M M	PAGE 張數 1 OF 1	