




SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 40mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Gold-plated 3u"
 Solder Tabs: Brass/Gold-flash
 Material: Nylon 6T,UL94V-0
 Color: Natural(Black)

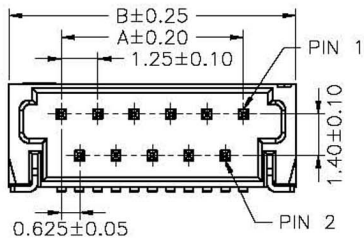


05,07,09,11 Contacts


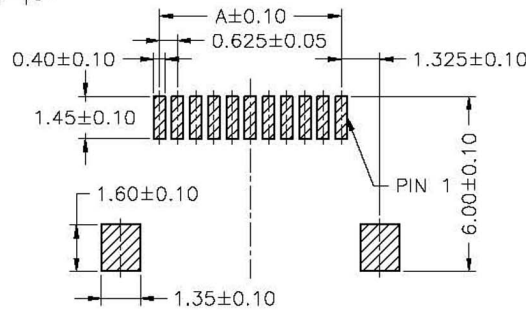


Ordering Information & Dimensions

	Dimensions	
	A	B
05P	2.50	6.10
07P	3.75	7.35
09P	5.00	8.60
11P	6.25	9.85
13P	7.50	11.10
15P	8.75	12.35
17P	10.00	13.60
19P	11.25	14.85
21P	12.50	16.10
31P	18.75	22.35
41P	25.00	28.60

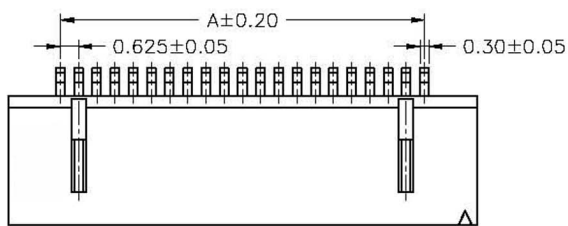

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

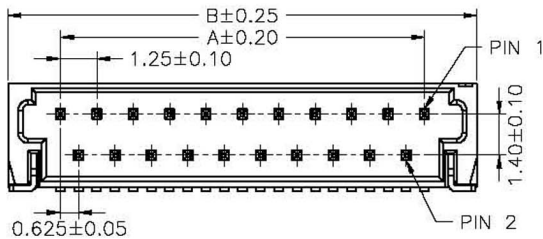

13,15,17,19,21,31,41 Contacts

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 Hedy
 DWG. 製圖 Yumi
 DATE 制表日 2008/08/28

SCALE 比例 參考
 UNIT 單位 MM
 PAGE 張數 1 OF 1
 TOLERANCE 容許公差
 .0 ±0.25
 .00 ±0.15
 ANG. ±
 SIZE 紙張尺寸 A4
 REV. 次 A

PART NAME 品名
 1.25mm WAFER XXPIN DUAL ROW SMT RIGHT
 ANGLE TYPE PLASTIC SHELL GOLD FLASH
 WITHOUT POLARIZING PEGS ROHS LOW-LEAD
 PART NO. 料號 W1361-XXPBNGB0R