
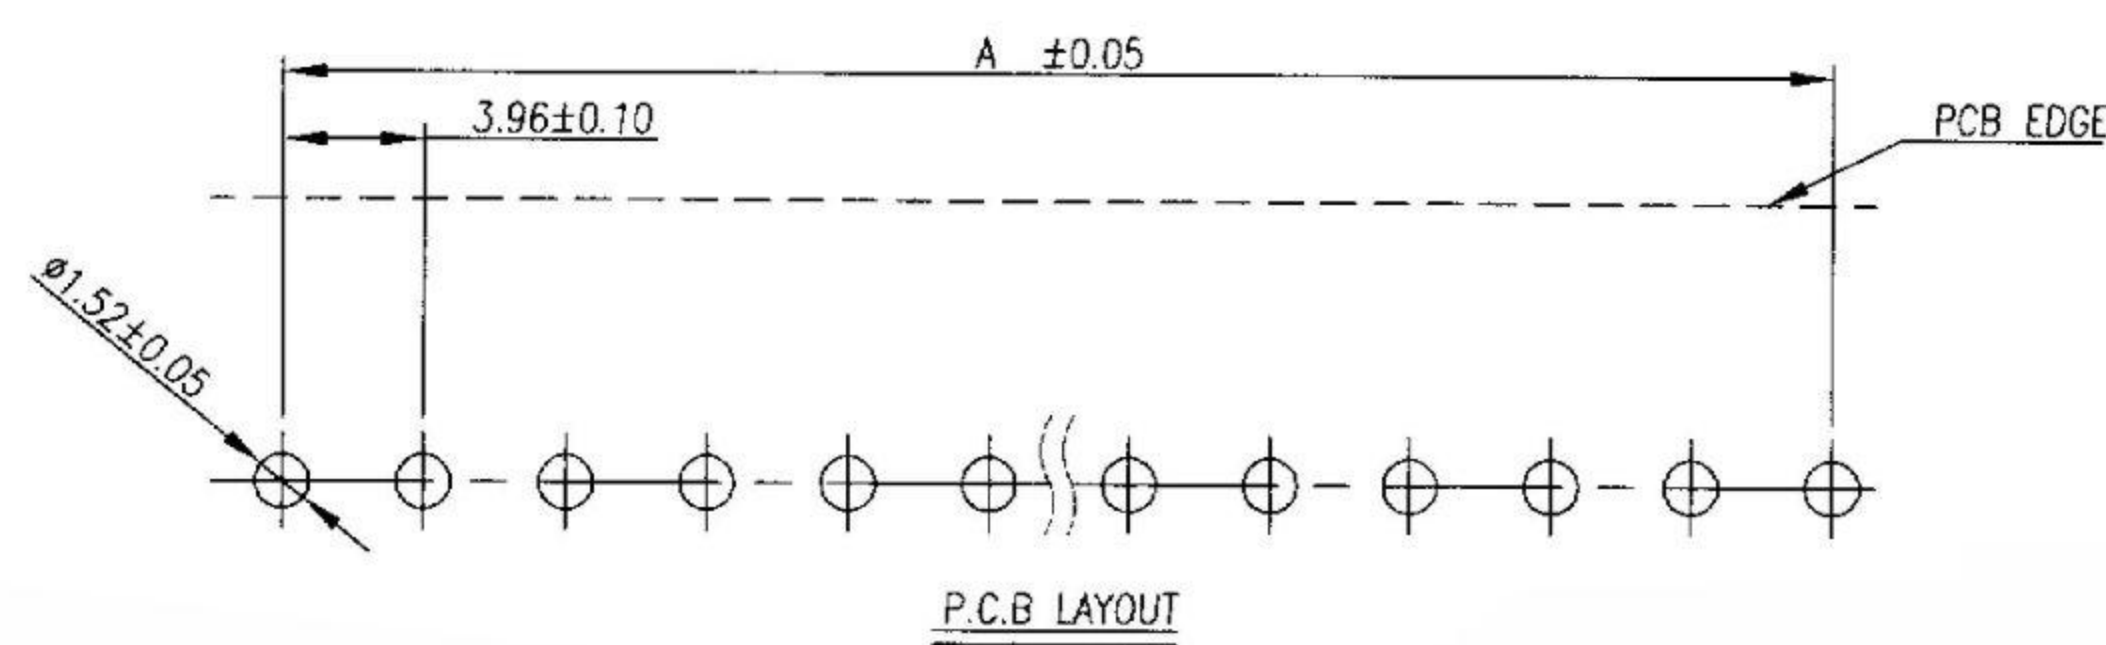


NO. OF CONTACT	Dimension		NO. OF CONTACT	Dimension	
	A	B		A	B
02	3.96	8.06	10	35.64	39.74
03	7.92	12.02	11	39.60	43.70
04	11.88	15.98	12	43.56	47.66
05	15.84	19.94	13	47.52	51.62
06	19.80	23.90	14	51.48	55.58
07	23.76	27.86	15	55.44	59.54
08	27.72	31.82	16	59.40	63.50
09	31.68	35.78			

NOTES:
 SPECIFICATION
 1.Current : 5A max.
 2.Voltage: 250V AC max.
 3.Insulation Resistance: 50K Megohms Min.
 4.Contact Resistance: 6 Milliohms Max.
 5.Dielectric Withstanding Voltage: 1500V AC
 6.Temperature: 0°C to +75°

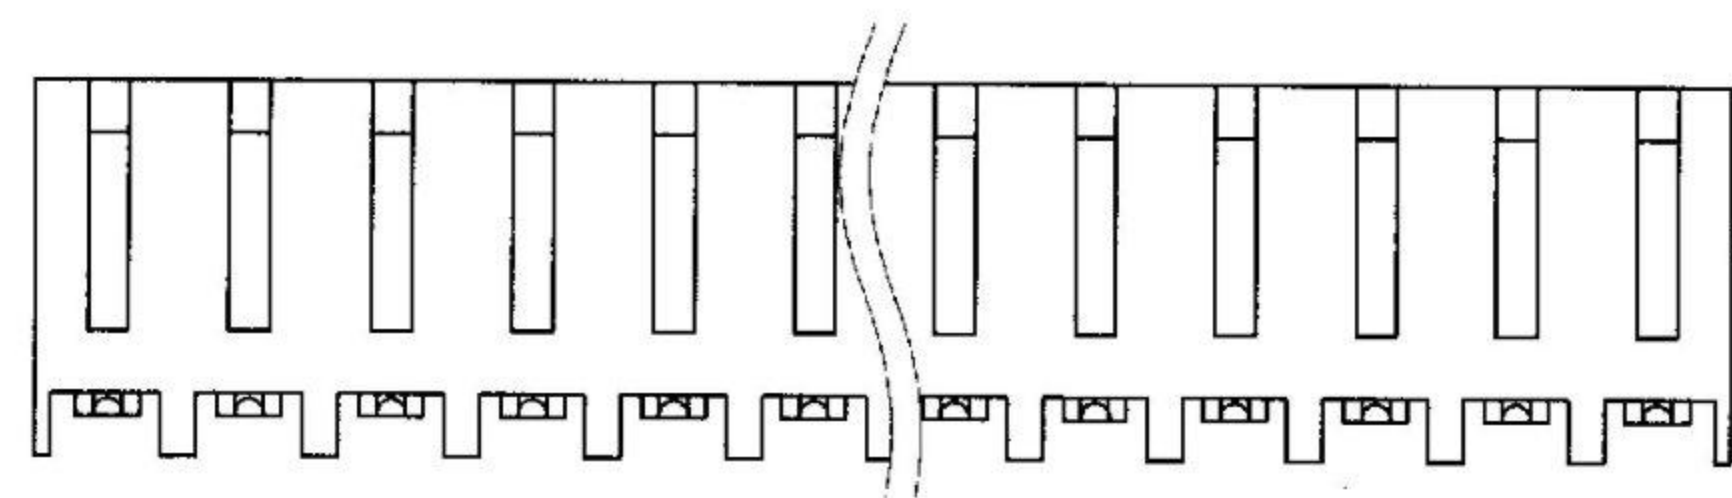

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± 0.35 .00 ± 0.1 ANG. ±	PART NAME 品名 3.96mm WAFER 1X??P RIGHT ANGLE W/O LOCKING RIBS WHITE INSULATOR ROHS
DWG. 製圖 HELEN	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 W1396-XXPANXW0R
DATE 制表日 2010/3/28	PAGE 張數 1 OF 1	REV. 版本 B	