
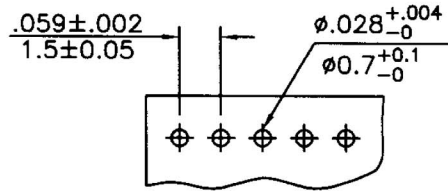
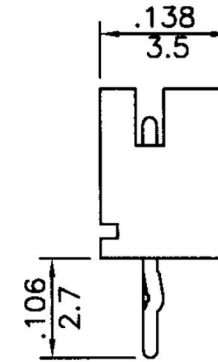
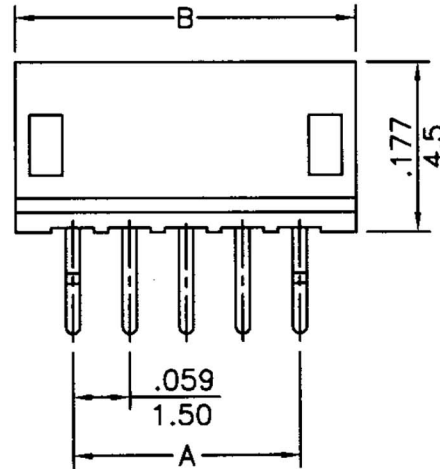


- * Poles: 2-13
- * Material: Insulator: NYLON UL94V-0
- * Contact: 0.5mm(.020") round pin, brass, tin plated

Specifications

- * Current rating: 0.7A AC, DC
- * Voltage rating: 50V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 500MΩ min.
- * Withstand voltage: 500V AC/minute
- * Applicable PC board thickness: .047" (1.2mm)



P.C. Board Layout

CIRCUITS	DIMENSION in.(mm)		CIRCUITS	DIMENSION in.(mm)	
	A	B		A	B
2	0.059(1.50)	0.177(4.5)	8	0.413(10.50)	0.531(13.5)
3	0.118(3.00)	0.236(6.0)	9	0.472(12.00)	0.591(15.0)
4	0.177(4.50)	0.295(7.5)	10	0.531(13.50)	0.650(16.5)
5	0.236(6.00)	0.345(9.0)	11	0.591(15.00)	0.709(18.0)
6	0.295(7.50)	0.413(10.5)	12	0.650(16.50)	0.768(19.5)
7	0.345(9.00)	0.472(12.0)	13	0.709(18.00)	0.827(21.0)

RoHS Compliant APPD. 核准 DWG. 製圖 Hedy DATE 制表日 2012/01/30	 SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 / 1	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 1.50mm WAFER 1XXP STRAIGHT TIN PLATING BEIGE COLOR BAG PACKING ROHS LOW-LEAD
		SIZE 尺寸 紙張尺寸 A4	PART NO. 料號 W1600-XXPSTBC0R
		REV. 版本 A	

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.