

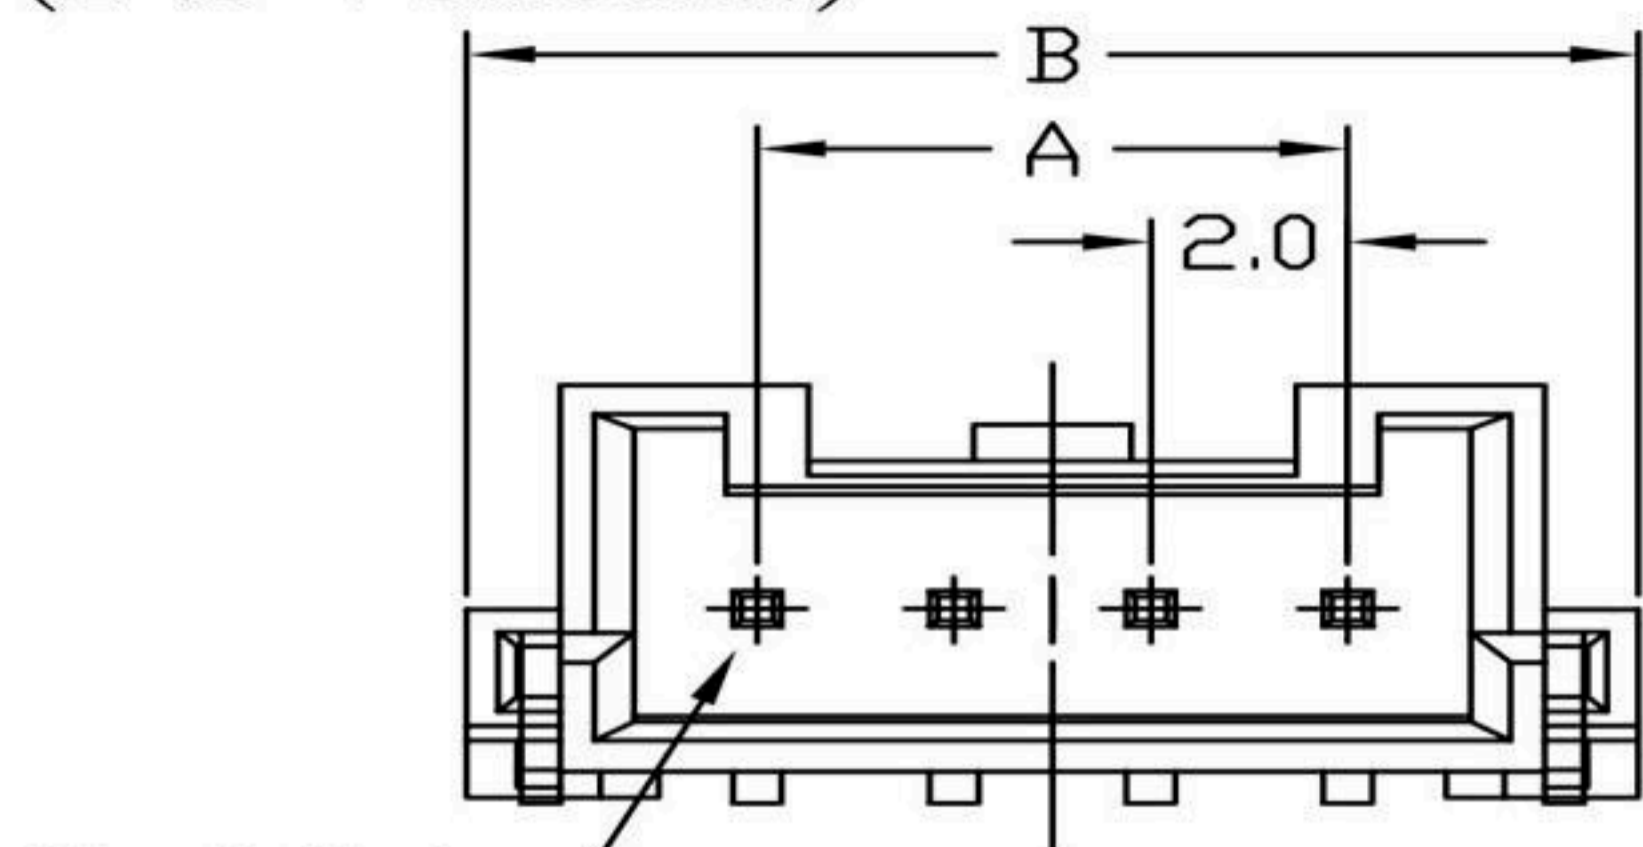
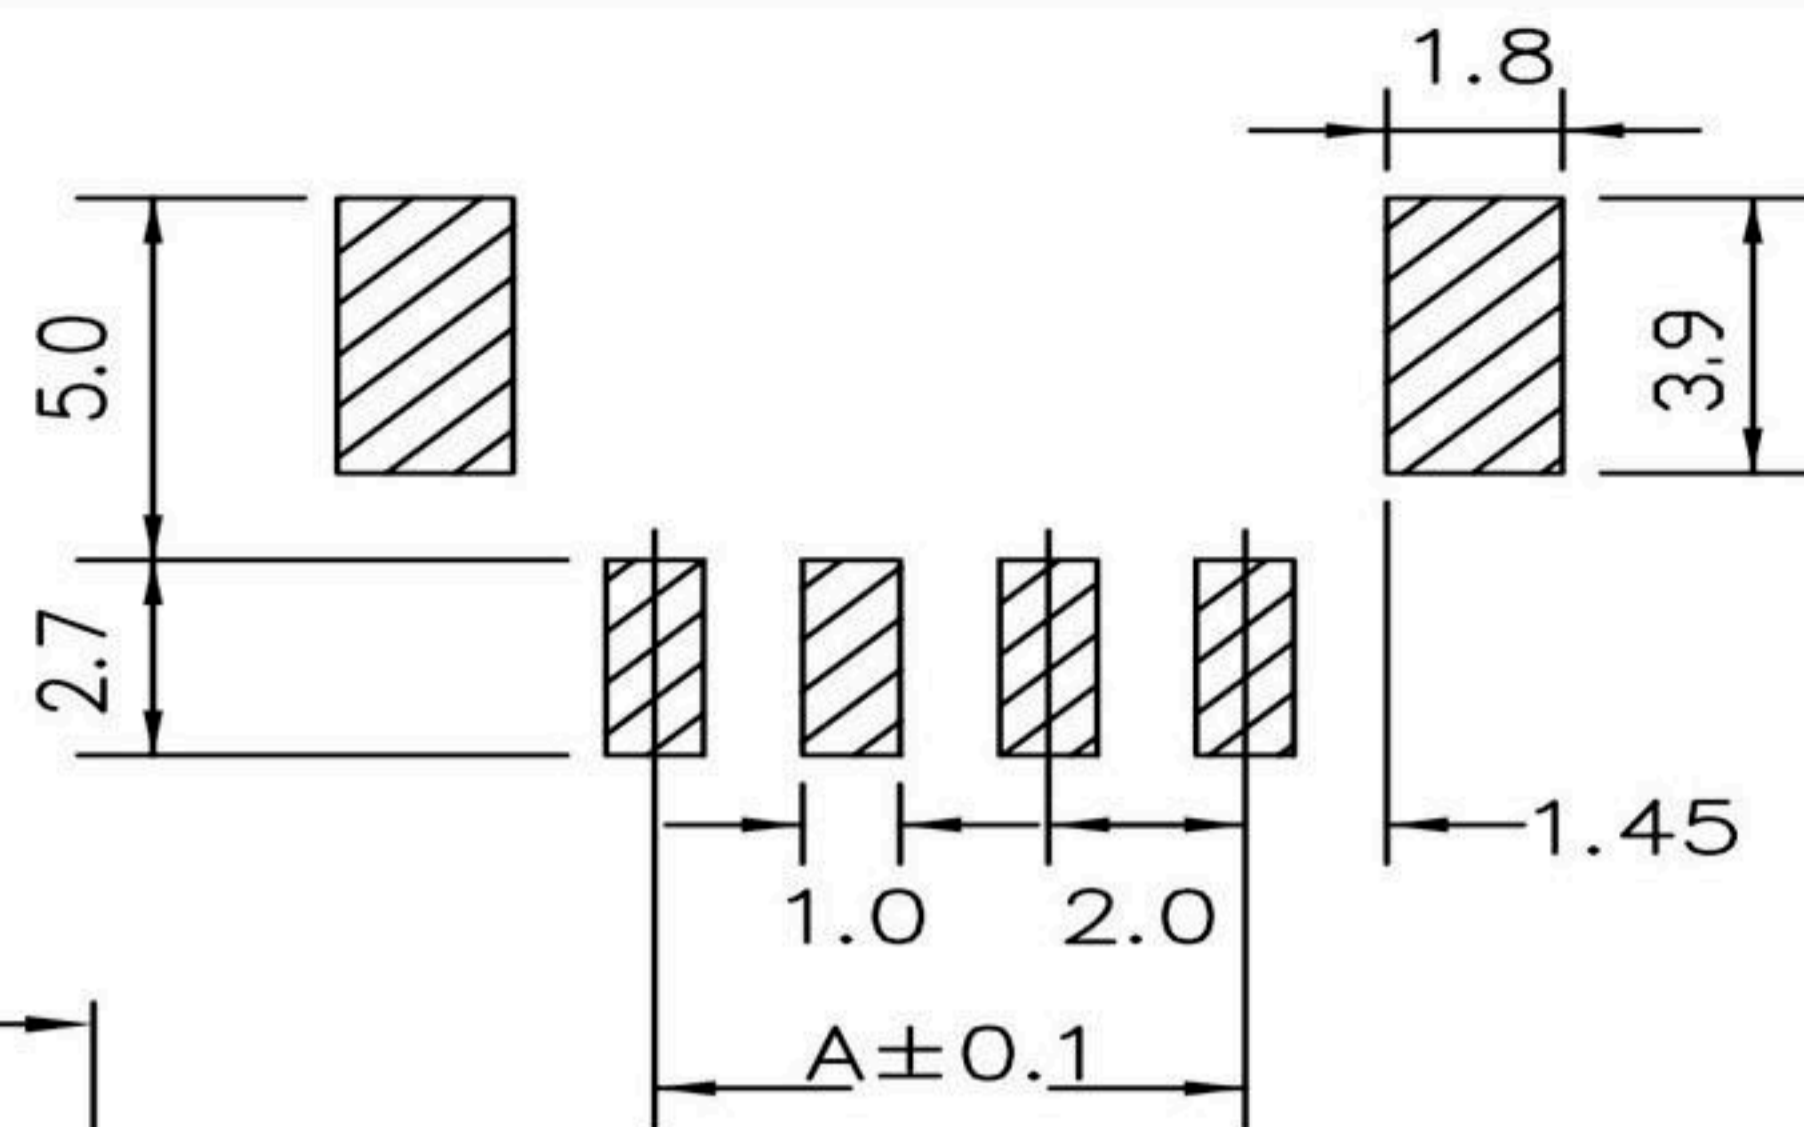



(2 to 4 circuits)

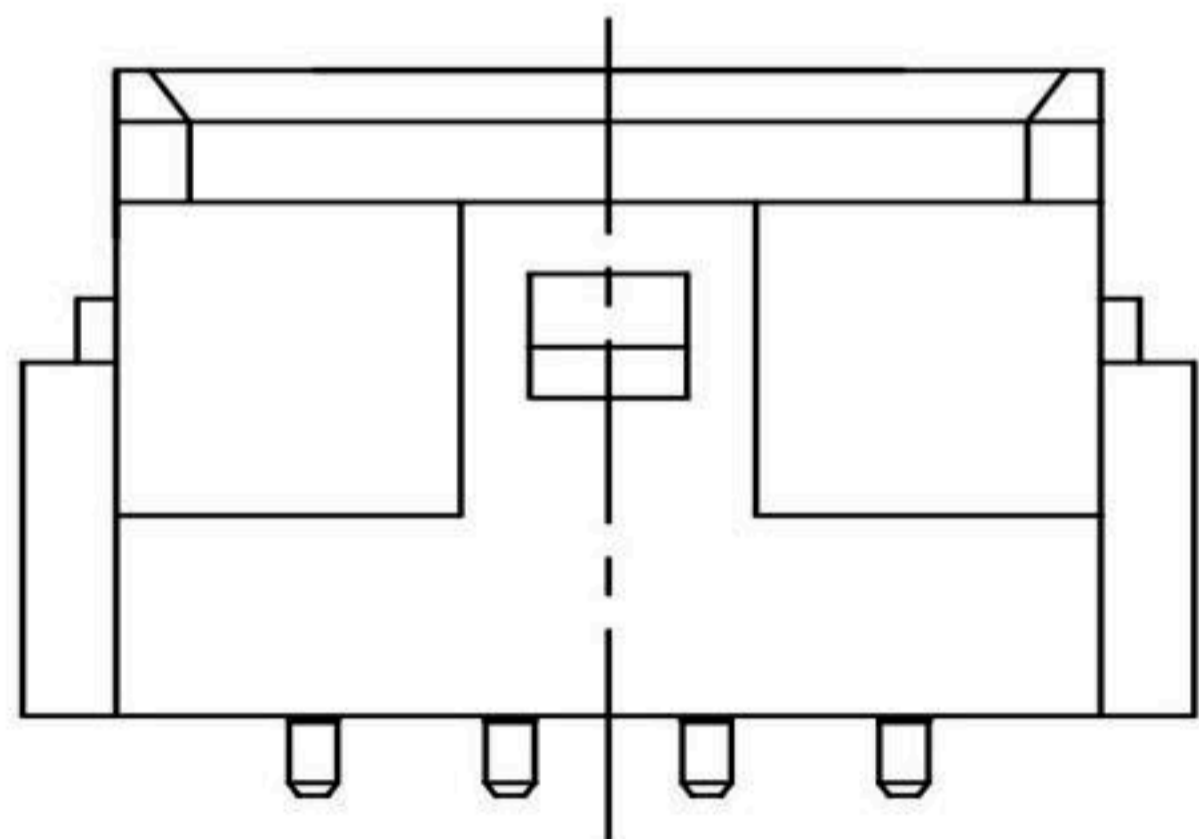

Circuit No.1

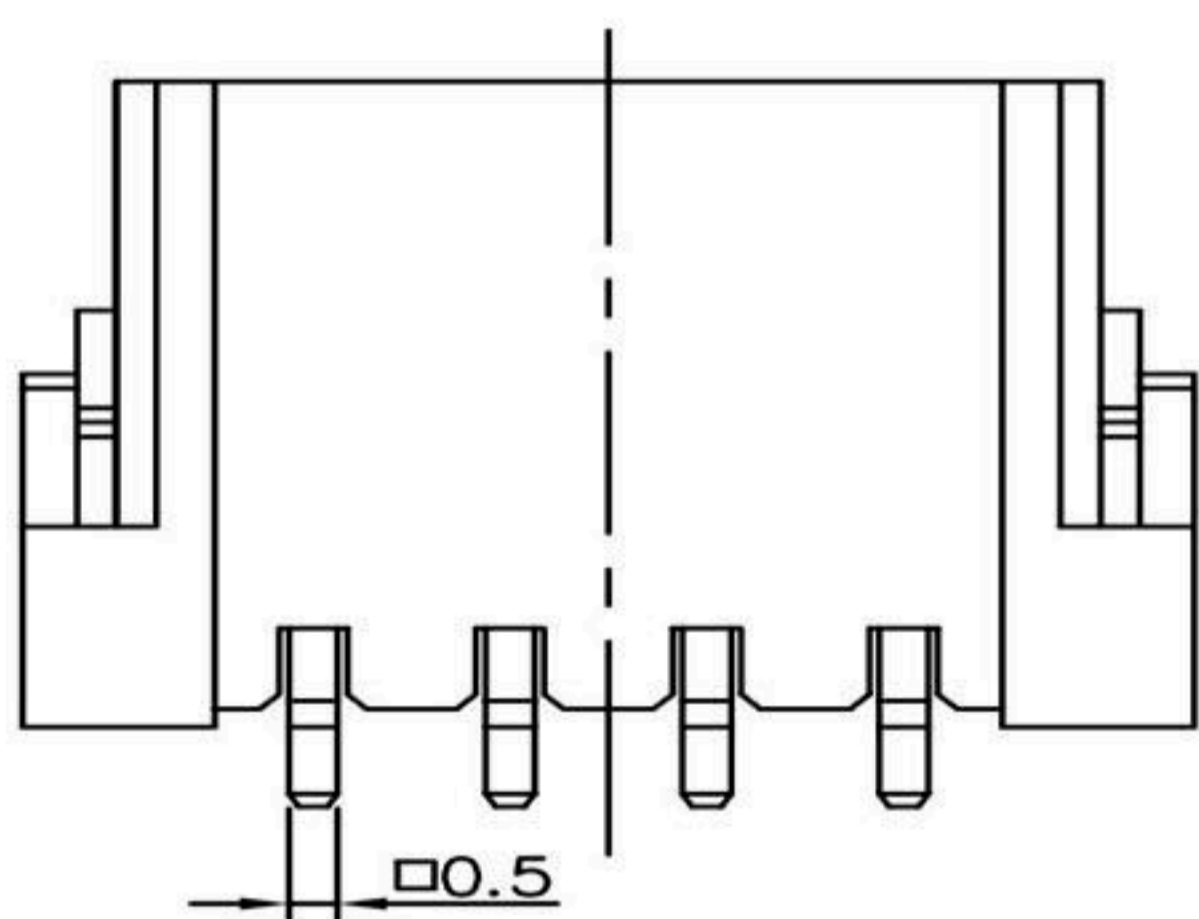

RECOMMENDED P.C. BOARD LAYOUT DIMM.

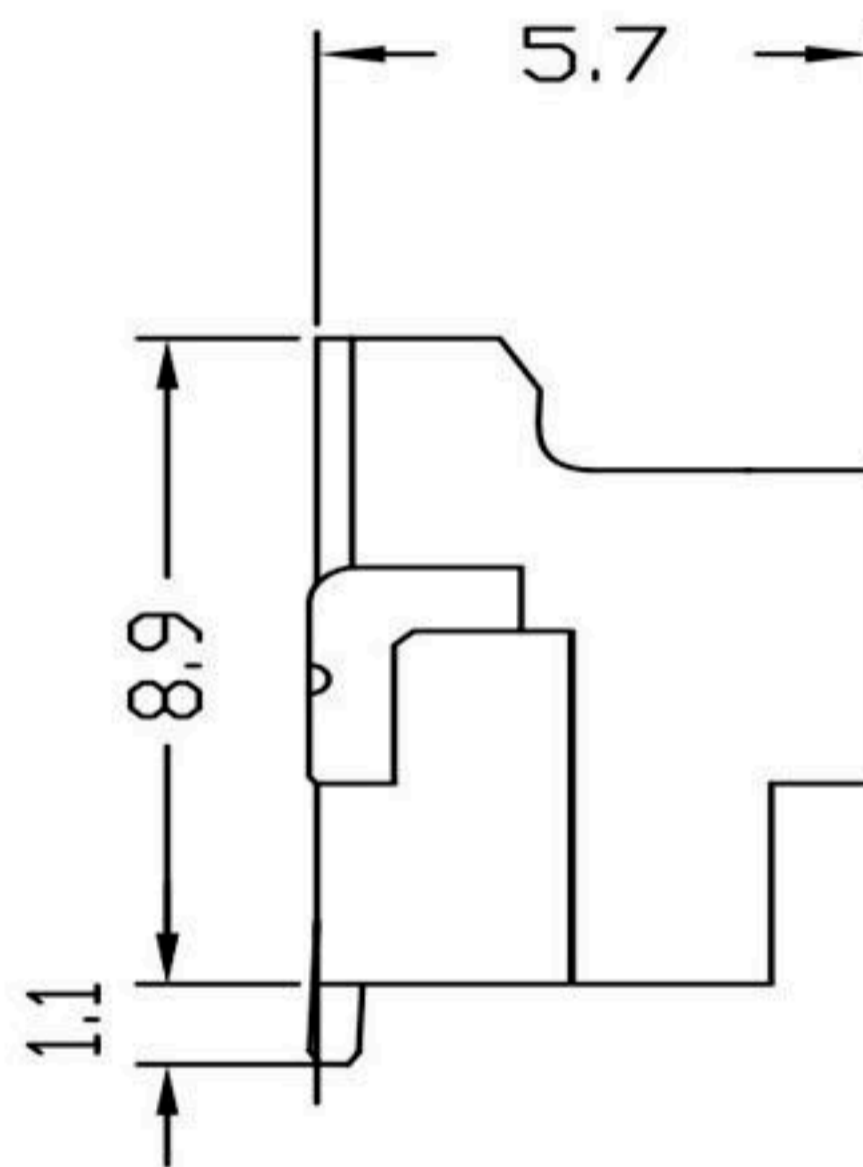

Specifications

Current Rating: 3A AC/ DC (Max)AWG#22
 Voltage Rating: 250V AC/ DC
 Temperature Range: -25°C ~ + 85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage:800V AC/Minute
 Pin : Brass/ Tin-plated/ Gold-flash
 Wafer Material: Nylon 6T,UL94V-0,natural
 Solder tab:Brass/Tin-plated

Poles	Dimension mm (in.)	
	A	B
2	2.0(0.079)	8.0(0.315)
3	4.0(0.157)	10.0(0.394)
4	6.0(0.236)	12.0(0.472)

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准
 DWG. 製圖 *Helen*
 DATE 制表日
 2013/6/10

SCALE 比例 參考
 UNIT 單位 MM
 PAGE 張數 1 OF 1

TOLERANCE 容許公差
 .0 ± 0.25
 .00 ± 0.2
 ANG. ±
 SIZE. 紙張尺寸 A4
 REV. 版本 A

PART NAME 品名
 JST PA 2.0mm WAFER 1X(2~4)P SMT RIGHT
 ANGLE TYPE TIN PLATING WHITE INSULATOR ROHS

PART NO. 料號
 W2112-(2~4)PBTWX0R