
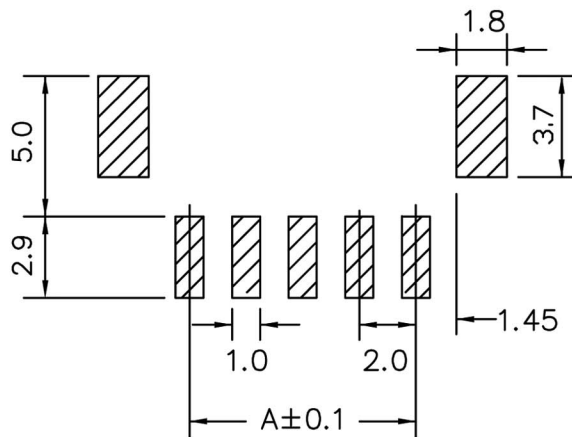


1 2 3 4 5 6 7 8

A

(2 to 9 circuits)

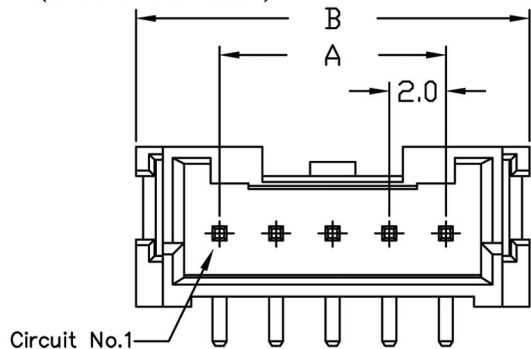

Specifications

Current Rating: 3A AC/ DC (Max)AWG#22
 Voltage Rating: 250V AC/ DC
 Temperature Range: -25°C ~ + 85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage:800V AC/Minute
 Pin : Brass/ Tin-plated/ Gold-flash
 Wafer Material: Nylon 6T,UL94V-0,natural
 Solder tab:Brass/Tin-plated

RECOMMENDED P.C.BOARD LAYOUT DIMM.

B

C




D

E

F

G

H

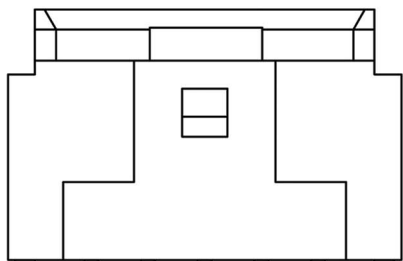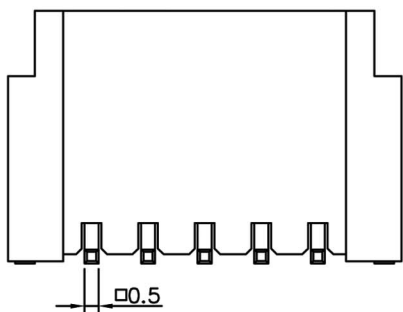

Poles	Dimension mm (in.)	
	A	B
2	2.0(0.079)	8.0(0.315)
3	4.0(0.157)	10.0(0.394)
4	6.0(0.236)	12.0(0.472)
5	8.0(0.315)	14.0(0.551)
6	10.0(0.394)	16.0(0.630)
7	12.0(0.472)	18.0(0.709)
8	14.0(0.551)	20.0(0.787)
9	16.0(0.630)	22.0(0.866)

RoHS Compliant	HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
	APPD. 核准	TOLERANCE 容許公差
DWG. 製圖 Hedy	SCALE 比例 參考 XX ± 0.20 XX ± 0.25	SIZE. 紙張尺寸 A 4
DATE 制表日 2010/11/02	UNIT 單位 MM	PART NO. 料號 W2112-XXPATWX0R
	PAGE 張數 1 / 1	REV. 版次 A

1 2 3 4 5 6 7 8