



**SPECIFICATIONS**

Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1000V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: PBT,UL94V-0  
 Color: Natural(Black)





P.C.B LAYOUT



Dimensions

NO.	Dimensions		
	A	B	C
02P	2.54	7.62	6.22
04P	7.62	12.70	11.30
05P	10.16	15.24	13.84
06P	12.70	17.78	16.38
08P	17.78	22.86	21.46
10P	22.86	27.94	26.54

RoHS Compliant		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 Betty		TOLERANCE X. X±0.25 X. XX±0.15 X. XXX±0.05	PART NAME 品名 2.54mm WAFER 1XXXP SINGLE ROW 180° TIN PLATING BLACK INSULATOR ROHS
DWG. 製圖 Betty	SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1	SIZE 紙張尺寸 A 4 REV. 版次 A	PART NO. 料號 W2420-XXPSSTB0R
DATE 制表日 2016/02/01			

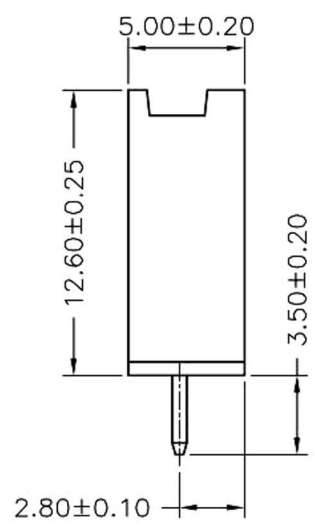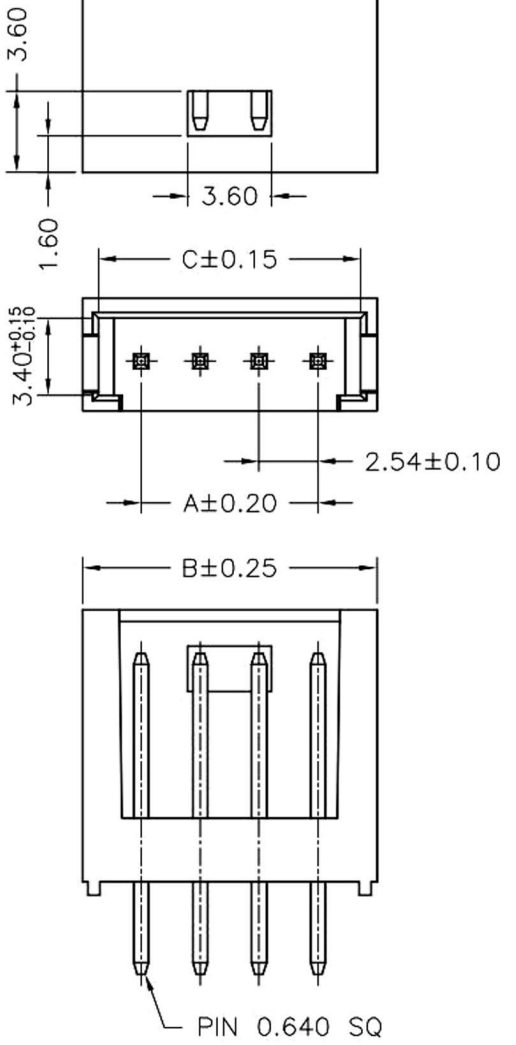

PIN 0.640 SQ