

Material & finish

SHELL:

Steel
Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor bronze or brass
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:


1000V for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

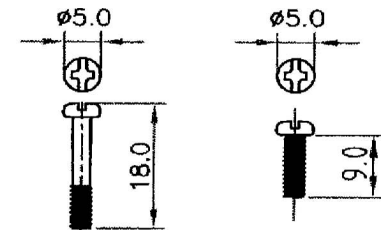

APPD. 核准 BETTY			TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 CENTRONIC COMMUNICATION TYPE 50M METAL COVER SELECTIVE GOLD BLUE INSULATOR ROHS LOW-LEAD		
DWG. 製圖 BETTY				SCALE 比例 參考	UNIT 單位 MM	SIZE 紙張尺寸 A4
DATE 制表日 2008/08/26		PAGE 張數 1 OF 1	REV. 版本 A			

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.