


■ **TERMINAL**

- Material: Phosphor bronze
- Thickness: 0.10mm
- Plating: 1μ" Gold plated
- Wire Range: Suitable for AWG#28~32
- Insulation O.D: 0.8mm (max)
- Q'TY: 15,000 pcs/reel
- Accepts housing : H9019 Series
H9020 Series
H9021 Series

■ **Specifications**

Electrical

- Current Rating :1A AC/DC (max)
- Voltage Rating :125V AC/DC (max)
- Operating Temp :-25°C~+85°C
- Insulation Resistance:100MΩ /min
- Dielectric Withstanding Voltage:250V AC/1 Min
- Contact Resistance:20MΩ /Max

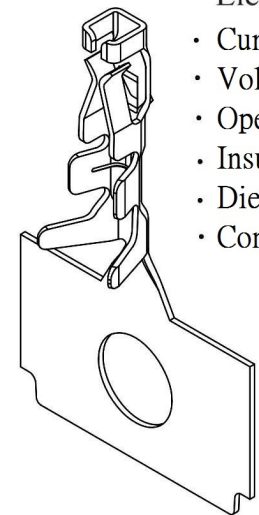

RoHS Compliant **HSM** 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 Betty	 SCALE 比例 参考	TOLERANCES UNLESS NOTED		PART NAME 品名 1.0mm TERMINAL MATERIAL:PHOSPHOR BRONZE GOLD FLASH PLATING SUITABLE FOR AWG28~32 ROHS
DWG. 製圖 Helen		LINEAR ±	x ±0.3 xx ±0.15 xxx ±0.08 ?	
DATE 制表日 2020/05/11	UNIT 單位 MM	ANGLES ±	SIZE. 紙張尺寸 A 4	PART NO. 料號 T9019-GPP00000R
	PAGE 張數 1 OF 1	REV. 版次 A		